



Avionics Databus  
Solutions

# ANET1553-x

Single or Dual Stream  
MIL-STD-1553A/B Test & Simulation  
Module for Standard Ethernet

Data  
Sheet



# ANET1553-x

## General Features

The ANET1553-x is a member of AIM's new line of Ethernet based modules for analysing, simulating, monitoring and testing MIL-STD-1553A/B databuses. The ANET1553-x concurrently acts as Bus Controller, Multiple Remote Terminals (31) and Chronological/Mailbox Bus Monitor. Versions with reduced functionality (Single Function or Simulator Only) are available as well as dockable versions for use in ADock Docking Station. All ANET1553-x modules have the capability to handle 8 General Purpose Discrete I/O (GPIO) signals and also offer Trigger I/O. A full range of MIL-STD-1553 protocol errors can be injected/detected. The ANET1553-x modules

can electrically reconstruct and replay previously recorded MIL-STD-1553A/B record files physically to the MIL-STD-1553A/B bus with excellent timing accuracy. The ANET1553-x offers an interface for 1 or 2 dual redundant bus streams.

The ANET1553-x modules use AIM's 'Common Core' hardware design utilising 2 RISC processors with 128MB of Global RAM and 256MB of ASP RAM. The onboard ASP (Application Support Processor) which is based on a SOC (System On Chip) hardware device is running under LINUX OS. This offers a scalable and flexible platform for hosting various onboard applications.


Per default, the ASP executes the AIM Network Server (ANS) for use by customer applications via the Standard AIM Application Programming Interface. ASP Application Software development is supported via the Standard Ethernet Interface. A cross tool chain for ASP can be provided and also standard Linux debugging features like GDB are available. The use of onboard processing and large memory enables autonomous operation with minimal interaction with the host PC.

A general purpose USB 2.0 port is available e.g. for USB memory devices, USB WLAN, used by the onboard OS and onboard applications like customer specific programs or embedded PBA.pro Engine. An onboard IRIG-B time encoder/decoder is included with sinusoidal output and free-wheeling mode for time tag synchronisation on system level using 1 or more ANET1553-x modules.


The physical bus interface provides programmable bus coupling modes and variable output amplitude to the MIL-STD-1553A/B bus.

Full function software support for application development on Windows and LINUX hosts is delivered with the ANET1553-x modules in comprehensive Board Software Packages (BSP's). The execution of customer written Python Scripts on the Application Support Processor of the ANET1553 is supported per default. For the development and execution of onboard customer applications written in C/C++ an optional S/W tool set (ANET-ADK) is available.

The standard PBA.pro™ Databus Test & Analysis Tool for Windows or Linux based hosts can be optionally purchased for use with ANET1553-x modules.

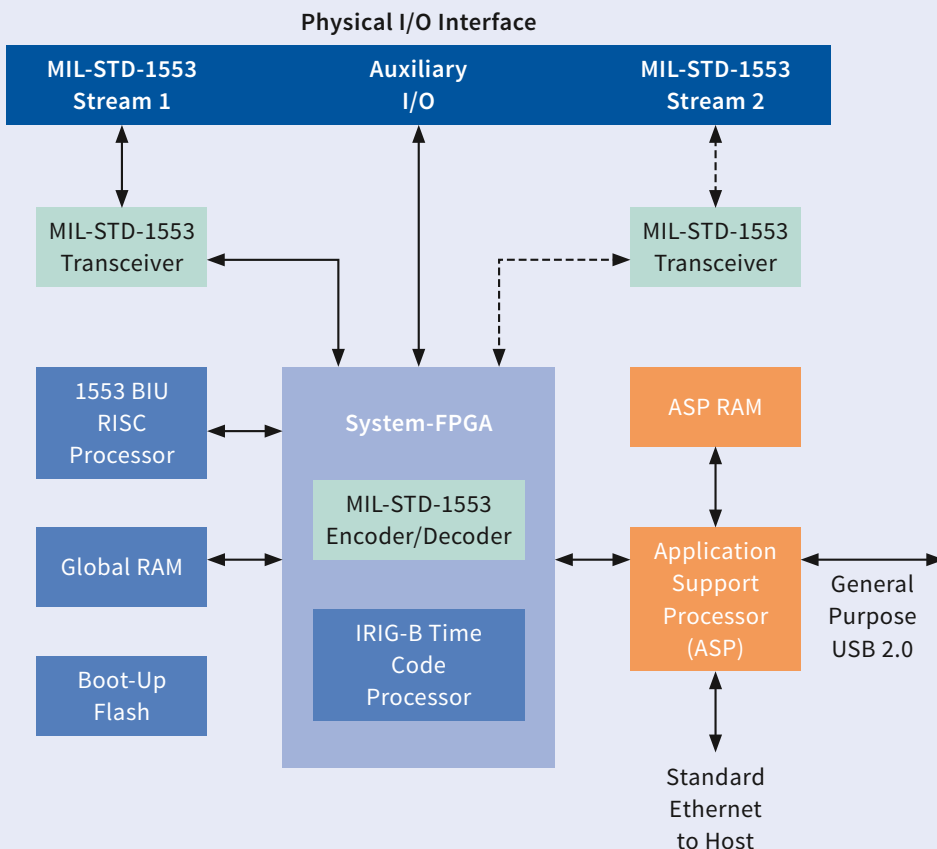

ANET1553-x  
Block Diagram

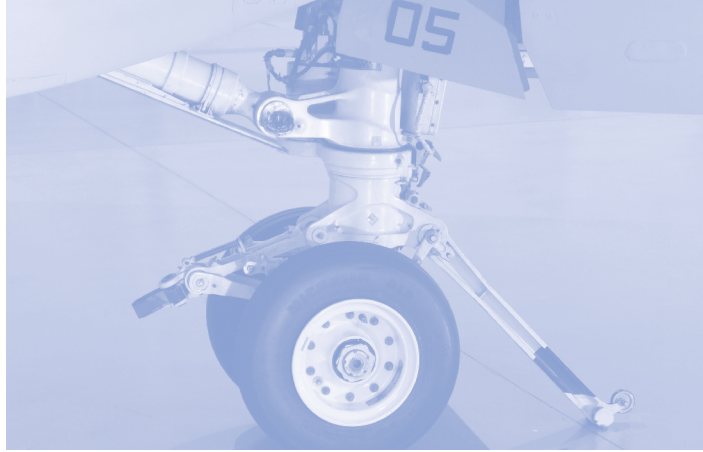

## Receive Channel Operation

The ANET1553-x modules provide real time Bus Controller functions on each independent, dual redundant MIL-STD-1553A/B Databus channel, concurrently with Multiple RT and Chronological Bus Monitor operation. 1x 400MHz RISC processor for up to 2 Dual Channel Bus Interface Units provides true simulation of BC operations without host computer interaction. Key features of the Bus Controller Mode include:

- Autonomous Operation including Sequencing of Minor/Major Frames
- Acyclic Message Insertion/Deletion
- Programmable BC Retry without Host Interaction
- Full Error Injection down to Word and Bit Level
- Multi-Buffering with Real Time Data Buffer Updates
- Synchronisation of BC Operation to external Trigger Inputs
- 4µs Intermessage Gaps
- Interrupt Generation on BC Transfer Events (for use by embedded Applications)
- Start on external Trigger Input

## Multiple Remote Terminal

The ANET1553-x modules simulate up to 31 Remote Terminals, including all sub addresses on each MIL-STD-1553 channel, concurrently with BC and Chronological Monitor operation. Alternatively each of the 31 RT's can operate in message oriented Mailbox Monitor Mode to monitor Non-Simulated RT's.

Key features of the Remote Terminal Simulation Mode include:

- Programmable RT Response Time down to 4µs for each simulated RT
- Programmable & Intelligent Response to Mode Codes
- Full Error Injection down to Word and Bit Level (AS4112 compliant)
- Multi-Buffering with Real Time Data Buffer Updates
- Mailbox Monitor Mode
- Interrupt Generation on RT Events (for use by embedded Applications)

## Physical Bus Replay

The ANET1553-x modules can electrically reconstruct and replay previously recorded MIL-STD-1553A/B record files physically to the MIL-STD-1553A/B bus with excellent timing accuracy.

Record files can be selected for Bus Replay. The additional capability to disable any or all RT responses from the MIL-STD-1553A/B replay enables smart systems integration and test to be performed.

## Physical Bus Interface

The physical bus interface provides transformer or direct coupling with software programmable variable output transceivers and a terminated bus network to enable the direct connection of a single BC or RT device. The coupling to the external bus is software programmable.

## Chronological Bus Monitor

The ANET1553-x modules provide full bus monitoring and analysis with time tagging of all bus traffic with 1µs resolution including response time and gap time measurement down to 250ns concurrently with BC and Multi RT operation. Key features of the Chronological Monitor include:

- 100% Data Capture on each Channel at full Bus Rates
- Single Shot, Continuous or Selective Capture Modes
- Autonomous Message Synchronisation and Full Error Detection
- 2 Dynamic Complex Triggers with Sequencing
- Message Filter and Selection Capture
- Bus Activity Recording independent from Trigger and Capture Mode
- Time Tagging:
  - All Bus Traffic to 1µs
  - Intermessage Gaps & Response Time to 250ns
- External Trigger Input & Output
- Programmable Response Time-Out

## IRIG-B Time Encoder/Decoder

ANET1553-x modules include an onboard IRIG-B time encoder/decoder with sinusoidal output and free-wheeling mode for time tag synchronisation. This allows synchronisation of multiple ANET1553-x modules and other AIM modules to 1 common IRIG-B time input source or to the onboard time code generator of 1 ANET1553-x module as the reference for correlation of data across multiple MIL-STD-1553A/B streams.

## Trigger-/General Purpose Discrete I/O Signals

The Auxiliary I/O connector provides BC and BM Trigger Inputs and BC and BM Trigger Outputs. Additionally up to 8 user programmable General Purpose Discrete I/O signals can be accessed via the Auxiliary I/O connector. Voltage levels of all trigger signals and General Purpose Discrete I/O's are TTL compatible whereas the General Purpose Discrete I/O's are designed to handle avionics level as well.

## Driver Software Support

The Driver Software is supplied with the ANET1553-x module. A full function Application Programming Interface (API) is provided compatible with Windows7 and Linux. Host applications can be written in C and C++. A LabView VI application interface is also provided (Windows only).

The configuration of the ANET1553-x is supported via a built-in Web based configuration application, accessible via any Standard Web Browser. The ANET1553-x LINUX OS on the ASP is pre-configured for the support of Mass Data storage devices at the USB Port and with a Python Installation for the execution of Python Scripts. The configuration of the ANET1553-x is supported via a built-in Web based configuration application, accessible via any Standard Web Browser.

# Technical Data

## System Interface

10/100 IEEE802.3 Standard Ethernet Interface

## Processors

1x 400MHz RISC Processor for BIU  
1x 400MHz Application Support Processor (ASP)

## Memory

128MB Global RAM (DDR-RAM),  
2x 8Mbit serial flash memory for the BIU,  
64Mbit serial flash memory for LCA,  
256MB RAM (DDR RAM) and 256MB flash  
memory for the ASP

## Encoder/Decoder

Up to 2x MIL-STD-1553A/B Encoder/Decoder with full error injection and detection

## Time Tagging

Sinusoidal 46-bit absolute IRIG-B time stamping with 1µs resolution

## Trigger I/O

BC/BM Trigger Input and Output Lines, TTL compatible on Auxiliary connector

## General Purpose Discretes

8 bi-directional Discrete I/O signals on Auxiliary connector

## Physical Bus Interface

1 or 2 MIL-STD-1553A/B Transceiver with variable Output Amplitude, Programmable Bus Coupling modes with onboard terminated Bus Network

## MIL-STD-1553 Connectors

Standard Twinax BJT77 male type connectors for each MIL-STD-1553 channel

## Ethernet

RJ-45 female standard Ethernet connector

## Auxiliary I/O

15-pin High-Density D-Sub connector for Discrete I/O, IRIG-B and Trigger signals

## DC Power

Standard DC low voltage power jack connector

## USB Port

1x general purpose USB 2.0 port via Type A connector

## Power Supply

9-15VDC input (external power adaptor included 110V-240VAC, 50-60Hz)

## Dimensions

120mm x 160mm x 26mm

## Weight

495g (ANET1553-2)

## Power Consumption

ANET1553-1: Typical 3.5W @12VDC  
ANET1553-2: Typical 4.3W @12VDC (@50% Busload)

## Operating Temperature Range

Standard Temperature Range:  
0°C to 50°C  
Extended Temperature Range:  
-15°C to 60°C

## Storage Temperature

-40°C to +85°C

## Humidity

0 to 95% non-condensing

## Ordering Information

### ANET1553-1

Single Stream, Dual Redundant Standard Ethernet to MIL-STD-1553A/B Interface

### ANET1553-2

Dual Stream, Dual Redundant Standard Ethernet to MIL-STD-1553A/B Interface

### Common Features:

BC, Multi RT Simulator with Mailbox & Chronological Monitor;  
IRIG-B Time Encoder/Decoder,  
8 General Purpose Discrete I/O's,  
BC/BM Trigger I/O; 128MB Global RAM,  
256MB ASP RAM, 1x USB 2.0 General Purpose Port, preconfigured with ANS onboard application (default)

### ANET-USB-WIFI

USB Wifi Dongle, compatible to ANET Devices

### ANET-ADK

ANET onboard Software Development Kit including Documentation, Samples and Tool Chain; Requires LINUX based development platform

**Simulator Only** versions available: BC, Multi RT Simulator with Mailbox Monitor

**Single Function** versions available: Chronological & Mailbox Monitor or BC and Chronological & Mailbox Monitor or Multi-RT and Chronological & Mailbox Monitor

### Dockable Versions

(for use in ADock Docking Station) available upon request; please add -D to the part number.

For standalone use of dockable ANETs the ADock-1A adapter is available, offering connectors for Ethernet, USB and Auxiliary signals (IRIG-B, Discretes, Trigger I/O), equivalent to the standard ANETs.

Version in Rugged Housing is available upon request.

## AIM Office Contacts:

### AIM GmbH

Sasbacher Str. 2  
D-79111 Freiburg / Germany  
Phone +49 (0)761 4 52 29-0  
Fax +49 (0)761 4 52 29-33  
sales@aim-online.com

### AIM GmbH – Munich Sales Office

Terofalstr. 23a  
D-80689 München / Germany  
Phone +49 (0)89 70 92 92-92  
Fax +49 (0)89 70 92 92-94  
salesgermany@aim-online.com

### AIM UK Office

Cressex Enterprise Centre, Lincoln Rd.  
High Wycombe, Bucks. HP12 3RB / UK  
Phone +44 (0)1494-446844  
Fax +44 (0)1494-449324  
salesuk@aim-online.com

### AIM USA LLC

Seven Neshaminy Interplex  
Suite 211 Trevose, PA 19053  
Phone 267-982-2600  
Fax 215-645-1580  
salesusa@aim-online.com