


AMCX-FDX-2

2 Port 10/100/1000Mbit/s
AFDX®/ARINC664P7
Test, Simulator and Monitor
Module for PMC

Data
Sheet

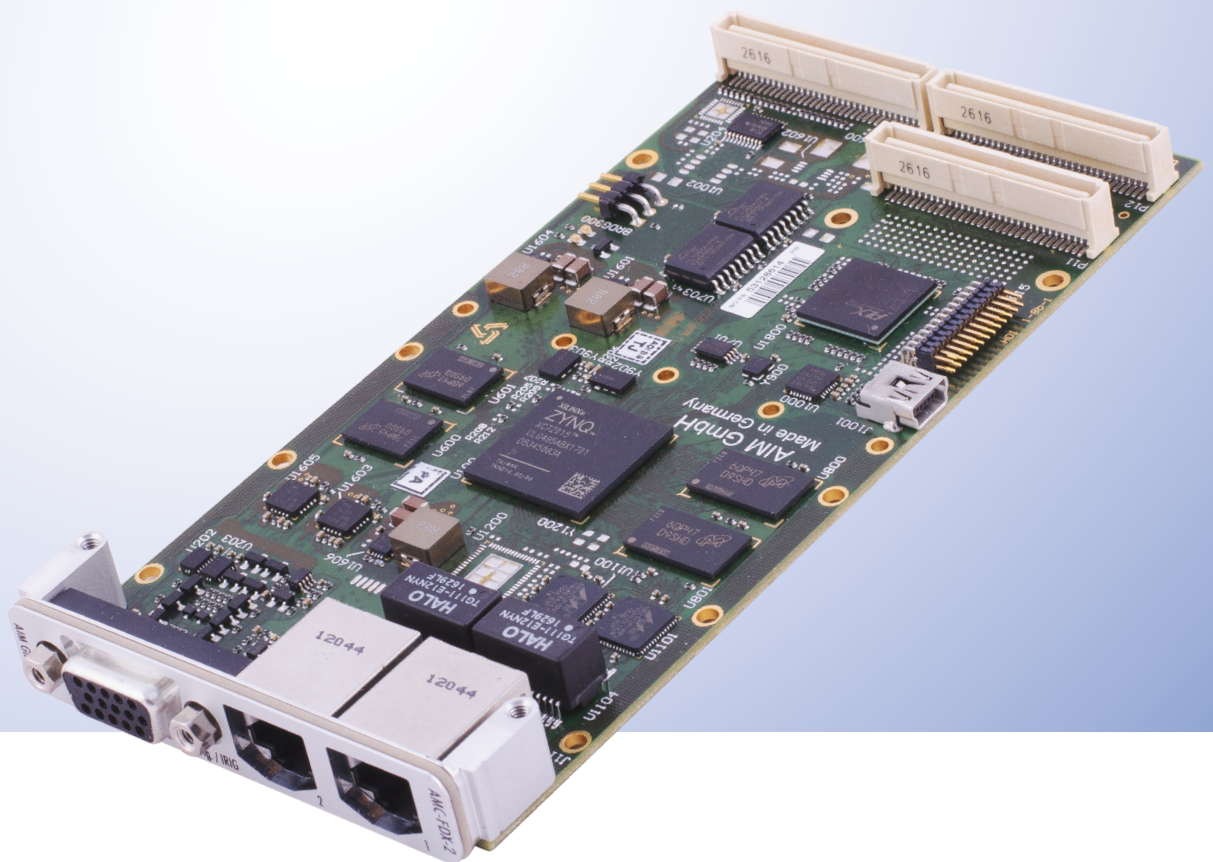

AMCX-FDX-2

General Features

The AMCX-FDX-2 is AIM's new high performance PMC module offering full function test, simulation, monitoring and analyzer functions for AFDX®/ARINC664P7 (Avionics Full Duplex Switched Ethernet) networks. Versions available for both Airbus and Boeing variants of the ARINC664P7.


The board supports the Boeing ARINC664 extensions for EDE at the hardware interface layer with field proven real time simulation of EDE subscribers to meet all parts and multiple revisions of the EDE specifications. Its unique onboard processing capability, memory resources, customized AFDX® MACs and IRIG-B time code decoder/generator gives AFDX® users a comprehensive feature set for the most demanding AFDX® applications.

The AMCX-FDX-2 module provides 2 AFDX® ports being configured as 2 single or 1 dual redundant port each implementing a 10/100/1000Mbit/s full duplex Ethernet interface. Ports can operate concurrently in traffic simulator or receiver/monitor modes with support for AFDX® port related frame statistics. Virtual Link (VL) packet capturing and monitoring features are complimented with powerful triggering and filtering capabilities. An integrated TAP mode enables analyzing network traffic in-line, with all onboard and PBA.pro features between 2 attached Ethernet devices.

The AMCX-FDX-2 uses AIM's field proven Common Core hardware design, utilizes a powerful System on Chip (SoC) system, integrated in a Xilinx ZYNQ® device, including programmable logic and a dual core processor. One processing core is acting as Bus Interface Unit (BIU) processor and the other as the Application Support Processor (ASP). The extensive memory resources onboard allow to implement large receive buffers and complex transmit scenarios onboard. An AFDX®/ARINC664P7 specific Physical Bus Interface implements 2 full duplex ports for connection to AFDX® networks.

The AMCX-FDX-2 module is available with the optional PBA.pro analyzer software package for Windows and Linux.

AMCX-FDX-2 Block Diagram

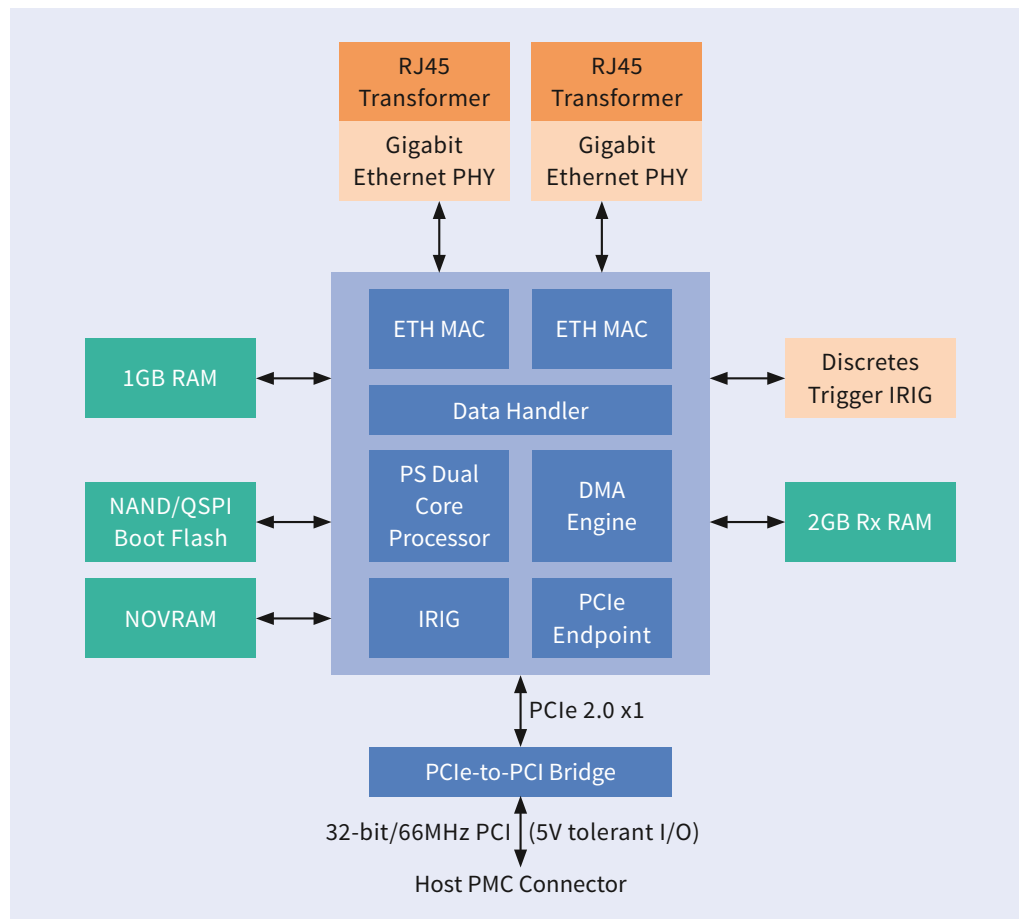

- 10/100/1000Mbit/s Ethernet compliant Frontend
- Xilinx ZYNQ® SoC, including Dual Core Processor
- Designed for Applications such as:
 - Test and Verification of End Systems
 - Switch Testing
 - Monitoring of Traffic between End Systems and Switch
 - Inter Switch Traffic Analysis
 - Multi Stream High Level System Integration
- Programmable Ports – Traffic Simulator and Receiver/Monitor Concurrently
- Synchronized Timing across Multiple Modules
- Driver Software for Windows and Linux

Traffic Generation

The AMCX-FDX-2 provides real time traffic generation on both ports concurrently. Transmitter operation allows users to fully programme all fields of the AFDX® frame including the Virtual Link Identifier,

MAC Source Address, IP Structure, UDP Structure, Payload and Sequence number. Multiple modes of transmit sequencing are supported, these being generic/replay and UDP port oriented shaped transmissions. Users can program payload data with user defined or fixed data. Inserting the time tag in the payload data provides an elegant solution to measure frame transmit delays through the network. Synchronization of transmissions across multiple ports is achieved by using strobe inputs/outputs.

- Programmable Timing and Sequencing of Frames
- Physical Error Injection – CRC, Gap, Size, Alignment
- Logical Error Injection on Layers 2, 3, 4
- Timing Error Injection – Violation of Bandwidth Allocation Gap (BAG)
- Autonomous Dynamic Data Generation
- UDP Port Simulation with Traffic Shaping and Sequence Numbering
- Onboard Support for Sampling and Queuing Ports


UDP/VL Receive Mode

The AMCX-FDX-2 module ports can be configured to work in UDP/VL oriented receive mode. In this mode each UDP port has a separate buffer queue. Received frames are stored with frame headers containing time tag and status information. Frame header information can be stored and payload data optionally discarded for the testing of switches and the complete network. With the traffic shaping verification enabled, any violations are reported as errors in related frame headers.

- VL oriented Filtering
- Second Level Filtering on Generic Frame Parameter
- Time Stamping of Received Packets with extended IRIG-B Time Code
- Physical Error Detection, Frame Level – CRC, Gap, Size and Alignment
- AFDX® Specific Error Detection
- Traffic Shaping Verification
- Verification of MAC, IP and UDP Headers
- VL oriented Integrity Checking

Chronological Receive Mode (Monitor Mode)

The AMCX-FDX-2 module ports can be configured in chronological receive mode to sequentially receive frames and store them in a circular buffer. The payload data can be discarded to optimize the use of the buffer for frame capture and analysis. Powerful filtering, triggering, complex triggering and capture modes allows users to select only the frames, data and errors of interest. Monitor mode also provides activity monitoring and statistics for each VL recorded by the AMCX-FDX-2 module. The interface modules report the number of frames received and the number of errors detected globally and in VL oriented format.

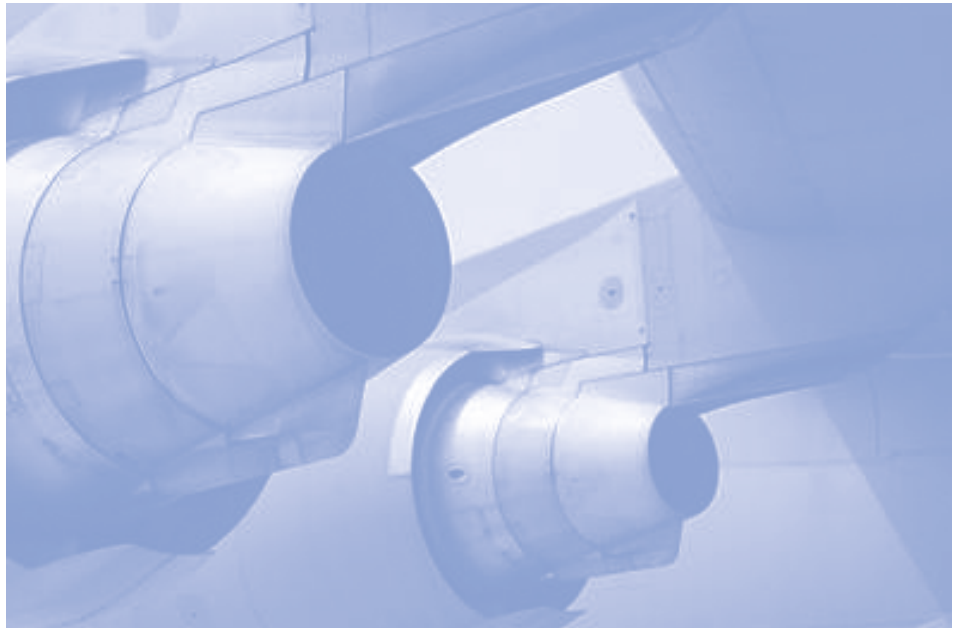

- VL orientated Receive and Filtering
- Second Level Filtering on Generic Frame Parameters
- Chronological Monitor with Time Stamping
- Massive onboard Monitor Buffer
- Inter Frame Gap Time Measurements with 40ns Resolution
- Comprehensive Triggering/Filtering/Capturing
- Programmable Data Capture Modes – Trace after Trigger and Recording
- Physical Error Detection – CRC, Gap, Size and Alignment
- AFDX® specific Error Detection

TAP Mode

The AMCX-FDX-2 can operate in TAP mode in all network speeds. This allows to analyze the network traffic between 2 attached network devices. Inter-Message-Timing will not be changed in this operational mode and network data will not be modified ensuring full operation of attached ports.

Application Support Processor

The Application Support Processor (ASP) is realized using 1 core SoC processing system and provides unique on-module processing functions typically provided by host PC processing systems.

- IP and UDP layer of the AFDX® protocol
- Driver Software Execution on the Board
- Dynamic Data Generation
- Loop/Pollution between Rx and Tx Port
- Automatic Test Sequence Generation
- Program using Linux Operating Systems

IRIG-B Time Code Decoder

An onboard IRIG-B time code decoder and generator allows synchronization of multiple AFDX® ports using multiple AMCX-FDX-2 modules. Modules can be synchronized using an external IRIG-B time source or the onboard time code generator of 1 module as the reference for accurate correlation of data across multiple AFDX® ports.

Physical Bus Interface

The AMCX-FDX-2 modules provide 2 AFDX® ports which can be used as 2 single channels or as 1 dual redundant channel AFDX® specific physical bus interface.

- Customized Media Access Controllers (MAC's) implemented in FPGA (SoC), optimized for AFDX®
- 3GByte DDR3 Memory for System, Receiver and Transmitter Buffer
- Physical Interface and Magnetics (COTS)
- 8-Socket Network Interface Connectors – RJ45
- Trigger, Strobe and Time Code I/O Connector

Driver Software Support

The driver software is supplied with the AMCX-FDX-2 module. A full functional Application Programming Interface (API) is provided compatible with 32/64-bit Windows and Linux. Host applications can be written in C/C++. A LabView/VI application interface as well as LabViewRT drivers are provided.

Technical Data

System Interface

PCI Rev. 3.0 compatible, 3.3V (5V tolerant)
I/O, 66MHz, 32-bit

Processors

Dual Core Processing System, integrated
in SoC device

Memory

1GByte DDR3 Processing System RAM
2GByte DDR3 MAC Receiver RAM

Encoder/Decoder

2 AFDX® specific Ethernet MAC's, integrated
in SoC device;

Inter Frame Gap generation and
measurement with 8ns resolution
(1000Mbit/s operation)

Time Tagging

46-bit absolute IRIG-B time with
100ns resolution;
Inter Frame Gap generation and
measurement with 8ns resolution

Physical Bus Interface (PBI)

2 full duplex AFDX® ports configurable to
1 dual-redundant AFDX® port or to
1 TAP port

Connectors

2 x 8 way RJ45 connectors, 1 per AFDX® port;
1 x 15 way D-Sub connector (female) for
time code, discrete I/O and trigger I/O;
PMC connector P11 and P12 for 32-bit
PCI interface

Dimensions

Single width XMC standard: 149mm x 74mm

Power Consumption

Typical 4.7W (10/100Mbit/s) /
5.5W (1000Mbit/s) (operating)

Operating Temp. Range

Standard: 0°C to +55°C ambient
Extended: -20°C to +75°C ambient on request

Storage Temp. Range

-40°C to +85°C ambient

Humidity

0 to 95% non-condensing

Ordering Information

AMCX-FDX-2

2 Port, 10/100/1000Mbit/s
AFDX®/ARINC664P7 PMC Module:
Traffic Simulator, Receiver and Chrono-
logical Monitor, Integrated Tap Mode,
IRIG-B Time Decoder, 3GB DDR3 RAM
Includes Driver Software for Windows,
LabVIEW VI's, LabVIEW RT, Linux, VxWorks
Note: Connector identical to AMC-FDX-2,
API compatibility to AMC-FDX-2 from
BSP V19.0.0

AMCX-FDX-2-G

2 Port, 10/100/1000Mbit/s
AFDX®/ARINC664P7 PMC Module:
Generic TX/RX Function Only,
Integrated Tap Mode, IRIG-B Time
Decoder, 3GB DDR3 RAM
Includes Driver Software for Windows,
LabVIEW VI's, LabVIEW RT, Linux, VxWorks
Note: Connector identical to
AMC-FDX-2-G, API compatibility to
AMC-FDX-2-G from BSP V19.0.0

AMCX-FDX-2-S

2 Port, 10/100/1000Mbit/s
AFDX®/ARINC664P7 PMC Module:
Simulator TX/RX Function Only,
Integrated Tap Mode, IRIG-B Time
Decoder, 3GB DDR3 RAM
Includes Driver Software for Windows,
LabVIEW VI's, LabVIEW RT, Linux, VxWorks
Note: Connector identical to
AMC-FDX-2-S, API compatibility to
AMC-FDX-2-S from BSP V19.0.0

AMCX-FDX-2B

2 Port, 10/100/1000Mbit/s
AFDX®/ARINC664P7 PMC Module:
Traffic Simulator, Receiver and Chrono-
logical Monitor, Integrated Tap Mode,
IRIG-B Time Decoder, 3GB DDR3 RAM
Including Boeing EDE Specific Extensions
Includes Driver Software for Windows,
LabVIEW VI's, LabVIEW RT, Linux, VxWorks
Note: Connector identical to
AMC-FDX-2B, API compatibility to
AMC-FDX-2B from BSP V19.0.0

AMCX-FDX-2B-G

2 Port, 10/100/1000Mbit/s
AFDX®/ARINC664P7 PMC Module:
Generic TX/RX Function Only, Integrated
Tap Mode, IRIG-B Time Decoder,
3GB DDR3 RAM
Including Boeing EDE Specific Extensions
Includes Driver Software for Windows,
LabVIEW VI's, LabVIEW RT, Linux, VxWorks
Note: Connector identical to
AMC-FDX-2B-G, API compatibility to
AMC-FDX-2B-G from BSP V19.0.0

AMCX-FDX-2B-S

2 Port, 10/100/1000Mbit/s
AFDX®/ARINC664P7 PMC Module:
Simulator TX/RX Function Only,
Integrated Tap Mode, IRIG-B Time
Decoder, 3GB DDR3 RAM
Including Boeing EDE Specific Extensions
Includes Driver Software for Windows,
LabVIEW VI's, LabVIEW RT, Linux, VxWorks
Note: Connector identical to
AMC-FDX-2B-S, API compatibility to
AMC-FDX-2B-S from BSP V19.0.0

Versions available for both Airbus and
Boeing variants of the ARINC664P7

* AFDX® is a registered trademark of Airbus

AIM Office Contacts:

AIM GmbH

Sasbacher Str. 2
D-79111 Freiburg / Germany
Phone +49 (0)761 4 52 29-0
Fax +49 (0)761 4 52 29-33
sales@aim-online.com

AIM GmbH – Munich Sales Office

Terofalstr. 23a
D-80689 München / Germany
Phone +49 (0)89 70 92 92-92
Fax +49 (0)89 70 92 92-94
salesgermany@aim-online.com

AIM UK Office

Cressex Enterprise Centre, Lincoln Rd.
High Wycombe, Bucks. HP12 3RB / UK
Phone +44 (0)1494-446844
Fax +44 (0)1494-449324
salesuk@aim-online.com

AIM USA LLC

Seven Neshaminy Interplex
Suite 211 Trevose, PA 19053
Phone 267-982-2600
Fax 215-645-1580
salesusa@aim-online.com