

# General Specifications

μR10000  
Recorder



GS 04P01B01-01E

The μR10000 is a compact recorder with a recording width of 100mm. The model family consists of 1, 2, 3, 4 pen and a 6 dot models. Pen model realizes continuous recording for each channel, whereas the 6-dot model realizes a high speed of 6 dot / 10 sec. The input is universal input. High reliability is realized by contact free technology, such as high withstand voltage semiconductor relays, and pen servo unit using an ultra-small stepping motors. The versatile display such as multi-channel digital display, bar graph display, flag display, DI/DO status display, and date/time display are provided with 101 × 16 VFD dot display.

On models with the SD memory card (/EM1) option, measured data can be saved to an SD memory card while recording on chart paper. Further, on dot models, saved data can be replayed on chart paper.

The μR10000 can be used as a monitoring device and as a quality control instrument in many applications (such as process temperature monitoring, pollution, construction, furnaces, field of medical diagnosis, field of refrigerating, etc.).


The measuring accuracies noted in the general specifications have a margin of error that takes into account the product's components and the equipment used for adjustment and testing. However, the actual values calculated from the accuracy testing data upon shipment of the instrument from the factory are as follows.

Input		Measuring Range*1 (typical value)
DCV	20 mV	0.06 % of rdg + 1 digit
	60 mV	0.03 % of rdg + 1 digit
	6 V	0.03 % of rdg + 1 digit
TC*2	R	300 to 1760 °C: 0.06 % of rdg + 1.1 °C 0 to 300 °C: ± 1.5 °C
	K	0 to 1370 °C: 0.06 % of rdg + 0.5 °C -200 to 0 °C: 0.1 % of rdg + 0.5 °C
	J	0 to 1100 °C: 0.05 % of rdg + 0.4 °C -200 to 0 °C: 0.15 % of rdg + 0.4 °C
	T	0 to 400 °C: 0.05 % of rdg + 0.4 °C -100 to 0 °C: 0.15 % of rdg + 0.4 °C -200 to -100 °C: 0.15 % of rdg + 0.5 °C
	N	0 to 1300 °C: 0.05 % of rdg + 0.5 °C -200 to 0 °C: 0.3 % of rdg + 0.5 °C
	N	0 to 1300 °C: 0.05 % of rdg + 0.5 °C -200 to 0 °C: 0.3 % of rdg + 0.5 °C
RTD	Pt100	0.04 % of rdg + 0.2 °C

\*1: General operating conditions: 23±2 °C, 55±10% RH, supply voltage 90–132, 180–264 VAC, supply frequency within 50/60 Hz ±1%, warm-up of 30 minutes or more, no vibrations or other hindrances to performance.

\*2: These values do not include the reference junction compensation accuracy.

rdg: reading value.



μR10000  
(4-pen model)

## ■ STANDARD SPECIFICATIONS

### General Specifications

#### Construction

##### Mounting:

Flush Panel Mounting (vertical), mounting next to each other (horizontal and vertical).

Mounting may be inclined up to 30°, rear below front (with horizontal base).

Allowable panel thickness: 2 to 26mm

##### Material:

Case: Steel, front door: aluminium die casting.

##### Case color:

Case and door-frame: Charcoal gray light (Mansell 10B 3.6 / 0.3 or equivalent)

Door: Splash and dust-proof (based on DIN 40050-IP54).

##### Dimensions:

144 × 144 × 220mm (see dimensional drawings)

##### Weight (approx.):

1 pen	2.1kg	4 pen	2.4kg
2 pen	2.2kg	6 dot	2.5kg
3 pen	2.3kg		

#### Model

1, 2, 3, and 4 pen, 6 dot-model.

#### Input

Inputs: DCV: Direct Current Voltage input  
20mV to 50V, 1-5V range.

TC: Thermo couple.

RTD: Resistance Temperature Detector.

DI: Digital Input (contact or DC Voltage, TTL level).

DCA: Direct Current Input (using external shunt resistor (10Ω, 100Ω, 250Ω) )

**Measuring range: selectable per channel**

Input Type	Range	Measuring Range
DC V	20 mV	-20.00 to 20.00mV
	60 mV	-60.00 to 60.00mV
	200 mV	-200.0 to 200.0mV
	2 V	-2.000 to 2.000V
	6 V	-6.000 to 6.000V
	20 V	-20.00 to 20.00V
	50V	-50.00 to 50.00V
	1-5V*1	1.000 to 5.000V

\*1: Only linear scaling can be used (burnout is available)

Input	Range	Measuring Range °C	Measuring Range °F
TC	R*2	0.0 to 1760.0°C	32 to 3200°F
	S*2	0.0 to 1760.0°C	32 to 3200°F
	B*2	0.0 to 1820.0°C	32 to 3308°F
	K*2	-200.0 to 1370.0°C	-328 to 2498°F
	E*2	-200.0 to 800.0°C	-328.0 to 1472.0°F
	J*2	-200.0 to 1100.0°C	-328.0 to 2012.0°F
	T*2	-200.0 to 400.0°C	-328.0 to 752.0°F
	N*2	0.0 to 1300.0°C	32 to 2372°F
	W*3	0.0 to 2315.0°C	32 to 4199°F
	L*4	-200.0 to 900.0°C	-328.0 to 1652.0°F
RTD*6	Pt100*6	-200.0 to 600.0°C	-328.0 to 1112.0°F
	JPt100*6	-200.0 to 550.0°C	-328.0 to 1022.0°F
	WRe*5	0.0 to 2400.0°C	32 to 4352°F
DI	DCV input	OFF: 2.4V less ON: 2.4V or greater	
	Contact input	Contact input ON/OFF	

\*2: R, S, B, K, E, J, T, N: IEC 60584-1, DIN EN 60584-1, JIS C1602

\*3: W: W-5% Re/W-26% Re(Hoskins Mfg. Co.), ASTM E988-96  
(Type C equivalent of OMEGA Engineering Inc.)

\*4: L: Fe-CuNi, DIN43710, U: Cu-CuNi, DIN43710

\*5: WRe: W-3% Re/W-25% Re(Hoskins Mfg. Co.), ASTM E988-96  
(Type D equivalent of OMEGA Engineering Inc.)

\*6: Pt100: JIS C 1604, IEC 60751, DIN EN 60751  
JPt100: JIS C1604, JIS C1606  
Measuring current: i=1mA

**Measurement Interval:**

Pen model: 125ms / channel  
Dot printing model: 1s / 6 dot (AD integration time is 20ms or 16.7ms)  
2.5s / 6 dot (AD integration time is 100ms)

**A/D Integration Time:**

AUTO / FIX selectable  
AUTO: 20ms (50Hz) or 16.7ms (60Hz), automatically selected depending on the power supply frequency.  
FIX: 20ms (50Hz), 16.7ms (60Hz) or 100ms (50 / 60Hz)\*1 can be selected.

\*1 100ms integration time: only for dot printing model (not available for 1s / 6 dot measurement interval)

**TC Burnout:**

ON / OFF selectable (per channel).  
Burnout upscale / downscale selectable (per channel)  
Normal: less than 2kΩ, burnout: more than 10MΩ.  
Measuring current: approx. 10μA.

**1-5V Burnout:**

Burnout: less than 0.2V

**Filter:****Pen model:**

Signal damping: ON / OFF selectable per channel

Time constant : 2, 5, 10sec

**Dot printing model:**

Moving average: ON / OFF selectable per channel

Moving average cycle: 2 to 16

**Computation:****Differential computation:**

Between any two channels, however reference channel number must be smaller than measuring channel number.

Available for DCV, TC, and RTD range.

Both channels must have same range.

**Linear scaling:**

Available for DCV, TC, RTD and DI range.

Scaling range: -20000 to 30000

Data display & printout range:-19999 to 30000

Decimal point: User selectable

Unit: User settable, up to 6 characters

(alphanumeric & special characters).

**Square root:**

Available for DCV range.

Scaling range: -20000 to 30000

Data display & printout range:-19999 to 30000

Decimal point: User selectable

Unit: User settable, up to 6 characters

(alphanumeric & special characters).

Low level cut off: 0.0 to 5.0% of recording span

Bias addition: -10.0 to 10.0% of recording span

**Recording and Printing****Recording Method:**

Pen model: Disposable felt pens, Plotter pen

Dot printing model: 6 color wire dot.

**Pen Offset Compensation:**

ON / OFF selectable (Pen model only)

**Effective Recording Width: 100mm****Chart:**

Plain-paper Z-fold chart (16m)

**Step Response Time (pen):**

Approx. 1s / IEC 61143 method

**Recording Period:****Pen model:**

Continuous for each channel.

**Dot printing model:**

Max. 6 channel / 10 sec (the shortest recording period)

7 to 12 channels\* / 15 sec (the shortest recording period)

13 to 18 channels\* / 20 sec (the shortest recording period)

\* Including Math channels for the model with /M1 option

option

AUTO / FIX selectable

AUTO: Analog recording interval is depending on the chart speed

FIX: Analog recording interval is set to the shortest period

**Chart Speed:**

Pen model: 5 to 12000mm/h (82 increments)

Dot printing model: 1 to 1500mm/h (1mm step)

**Chart Speed Change:**

Speed 1, speed 2 change by remote control signals (option)

**Chart Speed Accuracy:**

Within  $\pm 0.1\%$  (for recordings longer than 1000mm, related to the grid of the chart paper)

**Relation between Chart Speed and Printout:****(Pen-model)**

Chart Speed	•Periodic Printout	•Alarm Printout •Message Printout •Chart Speed Change Time Printout
5 to 9mm/h	NA	Available
10 to 1500mm/h	Available	Available
1600 to 12000mm/h	NA	NA

**(Dot-printing model)**

Chart Speed	•Channel No. or Tag No.	•Periodic Printout	•Alarm Printout •Message Printout •Chart Speed Change Time Printout
1 to 9mm/h	Available	NA	Available
10 to 100mm/h	Available	Available	Available
101 to 1500mm/h	NA	NA	NA

**Relation between chart speed and printing intervals of periodic printouts (For AUTO interval setting):****(Pen-model)**

Chart Speed	Printing Interval of Periodic Printout
5 to 9mm/h	NA
10 to 18mm/h	Every 8 hours
20 to 36mm/h	Every 4 hours
40 to 72mm/h	Every 2 hours
75 to 135mm/h	Every hour
150 to 180mm/h	Every 30 minutes
200 to 320mm/h	Every 20 minutes
360 to 1500mm/h	Every 10 minutes
more than 1600mm/h	NA

**(Dot-printing model)**

Chart Speed	Printing Interval of Periodic Printout
1 to 9mm/h	NA
10 to 19mm/h	Every 8 hours
20 to 39mm/h	Every 4 hours
40 to 79mm/h	Every 2 hours
80 to 100mm/h	Every hour
101 to 1500mm/h	NA

**Recording Colors:****Pen model:**

pen1=red, pen2=green, pen3=blue,  
pen4=violet, plotter pen=purple

**Dot printing model:**

ch1=purple, ch2=red, ch3=green, ch4=blue,  
ch5=brown, ch6=black (color can be assigned to any channel)

**Recording Format:****1. Analog recording:**

Analog recording ON/OFF selectable for each channel of dot model

**Zone recording:**

Span: More than 5mm (1mm step)

**Partial expanded recording:**

Boundary position: 1 to 99%

Boundary value: Within recording span

**2. Digital printout:****Channel (dot model only):**

Channel number or TAG will be printed during analog recording. Approx. every 25mm this print will occur.

ON / OFF selectable (common for all channels)

**Alarm:**

At the right side of the chart, CH. No. or TAG, Type of alarm, date/time\*2 of alarm ON / OFF will be printed. Time of alarm ON / OFF, time of alarm ON, OFF selectable (common for all channels).

**Periodic printout contents:**

Date (mm/dd/yy), time(hh:mm), measurement data of each channel, scale printout, recording color, chart speed

**- Measurement data of each channel:**

- ON/OFF selectable
- Channel No. or tag, alarm status (for instantaneous mode), measuring value (according to instantaneous mode or report mode), measuring unit (up to 6 characters)

**- Scale printout:**

- ON/OFF selectable (common for all channels)
- 0 and 100% scale value (when using partial expanded recording, boundary value is recorded)
- Printout available in case of more than 40 mm of recording span

**- Recording color:**

Only for pen model (OFF selectable)

**- Periodic print interval:**

- Using internal timer
- Standard time 00:00 to 23:00(on the hour)
- Print interval setting (AUTO/MAN)\*4  
AUTO: Automatically set as chart speed  
MAN: 10, 12, 15, 20, 30 minute, 1, 2, 3, 4, 6, 8, 12, 24 hour

**- Periodic printout mode:**

Selectable from Instantaneous value mode / report mode/OFF mode

- Instantaneous value mode:  
Measuring value for each channel
- Report mode: Selectable from MIN, MAX, AVE, MIX(MIN/MAX/AVE), SUM, INST  
Report interval: Same as periodic printout interval
- OFF mode: Periodic printout is not executed.

**Message printout:**

With panel key or remote control option,  
up to 5 messages can be printed.  
Contents: Date/time\*1 and message (up  
to 16 characters).

**Record start time:**

Date/time\*2 will be printed when recording  
starts, ON / OFF selectable.

**Chart speed printout:**

Date/time\*2 when chart speed is changed  
will be printed, ON / OFF selectable.

**List printout\*3:**

Listings of range and alarm setting, etc.  
will be printed.

**Manual printout\*3:**

With panel key or remote control option,  
measuring value will be printed.

**SET UP printout\*3:**

Listings of settings in SET UP Mode will  
be printed.

\*1 Selectable from hh:mm, hh:mm:ss, mm/  
dd hh:mm, mm/dd hh:mm:ss, mm/dd/yy  
hh:mm:ss, OFF.

\*2 Selectable from hh:mm, hh:mm:ss, mm/dd  
hh:mm, mm/dd hh:mm:ss, mm/dd/yy hh:mm:ss

\*3 During printout trend recording will be  
interrupted.

\*4 According to printout settings all the items  
are not printed.

**Display****Display Method:**

VFD 101 × 16 dot matrix

15 display screens can be selected from the any of  
followings (default display is 6 screens)

- 1 channel digital display\*1, \*4: AUTO\*2/MAN\*3
- 2 channel digital display\*1, \*4: AUTO\*2/MAN\*3
- 4 channel digital display\*4: Channel No., alarm type,  
measuring value are displayed
- 6 channel digital display\*4: Measuring value display  
(only for dot model)
- 1 channel digital display\*4 + 1 channel bar graph  
display: AUTO\*2/MAN\*3
- 1 channel digital display\*4 + 4 channel bar graph  
display (only for pen model): AUTO\*2/MAN\*3
- 2 channel digital\*4 + 2 channel bar graph display:  
AUTO\*2/MAN\*3
- 4 channel bar graph display (only for 4 pen model)
- 6 channel bar graph display (only for dot model)
- Flag display
- DI/DO display (Available for model with /R1 or /A1, /  
A2, /A3 option)
- Alarm status\*1
- Date/time display (mm/dd/yy hh:mm)+Chart speed  
display
- Date/time display (mm/dd/yy hh:mm)\*5
- Chart speed display\*5
- Status display\*1
- System display
- Display Off (light out)\*1
- Split display: Upper/lower position display
- Tag 1 channel digital display\*1, \*4: AUTO\*2/MAN\*3
- Tag 2 channel digital display\*4: AUTO\*2/MAN\*3
- Tag 1 channel digital display\*4 + 1 channel bar  
graph display: AUTO\*2/MAN\*3
- Tag 1 channel digital display + 4 channel bar graph  
display\*4 (4 pen model only)
- Batch name For the model with /BT1 option
- SD card status display....When the /EM1 option is  
installed

**Status display:**

Recording in progress (RECORD)  
Shared alarm display (ALARM)  
Alarm occurrence No. display (1 2 3 4 5 6)  
Computation in progress(MATH).....For the  
model with /M1 option

Key lock display (KEYLOCK)

\*1 The displays can be specified for split display.

\*2 AUTO: Channel No., alarm type, measuring value,  
and measuring unit (6 digit) are displayed in order of  
channel No.

For 1 channel digital display + 1 channel bar graph  
display, the unit display is 3 digit.

\*3 MAN: The same contents of AUTO for the specified  
channel are displayed.

\*4 Display updated interval can be selected from AUTO  
/ MAN.

AUTO: 1s / 2s / 3s / 4s / 5s

MAN: 2s (pen model), same as measurement  
interval (dot model)

\*5 The display can be specified only for split display.

**Power Supply****Rated Power Voltage:**

100 to 240VAC, automatically selected depending  
on the power supply voltage

**Usable power voltage ranges:**

90 to 264VAC

**Rated Power Frequency:**

50 / 60 Hz, automatically selected

**Power Consumption:**

(approx.)

	100VAC Power Source	240VAC Power Source	Maximum
1-4 pen	12VA*	17VA*	40VA
6 dot	13VA*	18VA*	40VA

\* : In Balance

**Alarm****Number of alarm levels:**

Up to four levels for each channel

**Alarm types:**

High and low, limits, differential high and low  
limits, high and low rate-of-change limits and  
delay high and low

Alarm delay time: 1 to 3600s

Interval time of rate-of-change alarms:

The measurement interval times 1 to 15

**Display:**

Alarm value is indicated as a point on the bar  
graph.

**In occurring an alarm:**

- On bar graph display, a point indicator is  
flashing.
- On digital display, an alarm type indicator  
is shown.
- A channel number of occurring alarm is  
displayed.
- Shared alarm display

**Hysteresis:**

0.0 to 1.0% (0.1% step) of recording span (only  
High, Low alarm, common for all channels and all  
levels).



Alarm indication when ALARM ACK-key is pressed:

Non-hold-type:

Alarm display is not affected when the ALARM ACK-key is pressed.

Hold-type:

When alarm occurs, alarm indicator will start flashing. After ALARM ACK-key is pressed, indicator will show status of the alarm.

Hold-type:


Alarm ON

Alarm OFF

Indicator BLINK

Indicator ON

Indicator OFF

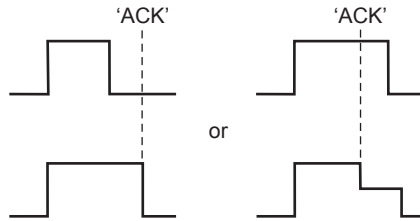

F01.ai

Non-hold type:

No action will occur when ACK-key is pressed.

ALM indicator depends on alarm status.

## Other Specifications

Clock:

With calendar function

Summer and winter time:

Summer and winter time can be set.

Clock Accuracy:

100 ppm, however not including error due to turning ON / OFF power

Panel Key Lock:

Protection by password

(Any of RCD, MENU, FEED key and functions (Alarm ACK, Math, Printout, Message, Buffer clear, Digital PRT, Pen exchange (only for pen model), ribbon cassette replacement (only for dot model), data save, replaying on chart paper (only for dot model), removing the SD memory card) can be locked).

Internal illumination:

White LED

Memory backup:

Lithium battery to protect setting parameters. Life is approx. ten years (at room temperature, and for standard model) and is installed inside the recorder.

Insulation Resistance:

Each terminal to ground terminal: More than 20MΩ (measured at 500VDC).

Dielectric Strength:

Power supply to ground terminal:

1500V AC (50 / 60Hz), 1 min

Contact output terminal to ground:

1500V AC (50 / 60Hz), 1 min

Measuring input terminal to ground:

1000V AC (50 / 60Hz), 1 min

Between measuring input terminals:

1000V AC (50 / 60Hz), 1 min

(except for RTD, since b-terminal is common).

Between remote control terminal to ground:

500V DC, 1min.

Mechanical noise:

Machine Noise Information Ordinance 3. GSGV, Jan. 18, 1991:

The maximum sound pressure level is equal or less than 60dB (A) according to ISO7779.

## Safety and EMC standards

CSA

CAN/CSA-C22.2 No. 61010-1, CSA-C22.2 No. 61010-2-030, Overvoltage Category II or I<sup>\*1</sup>, Pollution Degree 2<sup>\*2</sup>, Measurement Category II<sup>\*3</sup>

UL

UL 61010-1, UL Std. No. 61010-2-030 (CSA NRTL/C) Overvoltage Category II or I<sup>\*1</sup>, Pollution Degree 2<sup>\*2</sup>, Measurement Category II<sup>\*3</sup>

CE, UKCA

EMC directive:

EN 61326-1 Class A, Table 2 (For use in industrial locations) compliant

EN 61000-3-2 compliant

EN IEC 61000-3-2 compliant

EN 61000-3-3 compliant

EN 55011 Class A Group 1 compliant

Low voltage directive:

EN 61010-1, EN IEC 61010-2-030 compliant, Overvoltage Category II or I<sup>\*1</sup>, Pollution Degree 2<sup>\*2</sup>, Measurement Category II<sup>\*3</sup>

EU RoHS directive:

EN IEC 63000 compliant

WEEE Directive: Compliant

EMC Regulatory Arrangement in Australia and New

Zealand(RCM): EN 55011 Class A Group 1 compliant

KC marking: KS C9811, KS C9610-6-2 compliant

\*1

Overvoltage Category

Describes a number which defines a transient overvoltage condition. It implies the regulation for impulse withstand voltage. Applies to electrical equipment which is supplied from fixed installations like distribution boards.

II: Applied to standard power supply (100 - 240 VAC)

I: Applied to /P1 option (24 VDC/AC)

\*2

Pollution Degree

Describes the degree to which a solid, liquid, or gas which deteriorates dielectric strength or surface resistivity is adhering.

"2" applies to normal indoor atmosphere.

Normally, only non-conductive pollution occurs.

\*3

Measurement Category II (CAT II)

Applies to measuring circuits connected to low voltage installation, and electrical instruments supplied with power from fixed equipment such as electric switchboards.

**Normal Operating Conditions**

Power voltage: 90 to 132, 180 to 264VAC  
Power frequency: 50Hz  $\pm$  2%, 60Hz  $\pm$  2%  
Ambient temperature: 0 to 50°C  
Ambient humidity: 20 to 80% RH (at 5 to 40°C)  
30 to 50% RH (at 0 to 5, 40 to 50°C)  
Vibration: 10 to 60Hz, 0.2m/s<sup>2</sup> or less  
Shock: Not acceptable  
Magnetic field: Less than 400A/m (DC and 50, 60Hz)

## Noise:

## Normal Mode (50 / 60Hz):

DCV Peak value including signal must be less than 1.2 times the measuring range.

TC Peak value including signal must be less than 1.2 times the measuring thermal electromotive force.

RTD less than 50mV.

## Common Mode (50 / 60Hz):

Less than 30VAC rms or 60VDC for the whole range.

## Maximum noise voltage between channels (50 / 60Hz) :

Less than 250VAC rms

\*In case /N2 (3 leg RTD) is specified  
less than 200VAC rms for 6 dot model

## Operating Position:

Frontward: 0° Backward: Within 30° from horizontal

## Warm-up Time:

Min. 30 minutes after power has been turned ON.

Altitude: 2000m or less

## Standard Performance

### Measuring and Recording Accuracy:

(Following specifications apply to operation of the recorder under standard operation conditions: temperature  $23 \pm 2^\circ\text{C}$ , humidity  $55 \pm 10\%\text{RH}$ , power supply voltage 90 to 132V, 180 to 264V AC, power supply frequency 50/60Hz  $\pm 1\%$ , warm-up time at least 30 minutes, other ambient conditions like vibration should not adversely affect the recording operation).

Input	Range	Measuring (digital display)		Recording (analog)	
		Measurement Accuracy*	Max. Resolution	Recording Accuracy	Resolution
DC V	20mV	$\pm(0.1\% \text{ of rdg} + 2 \text{ digits})$	10 $\mu\text{V}$	$\pm$ Measurement accuracy $\pm 0.3\%$ of recording span	Pen model dead band: 0.2% of recording span  Dot printing model resolution: 0.1mm
	60mV		10 $\mu\text{V}$		
	200mV		100 $\mu\text{V}$		
	2V		1mV		
	6V		1mV		
	20V		10mV		
	50V	$\pm(0.1\% \text{ of rdg} + 3 \text{ digits})$	10mV		
	1-5V	$\pm(0.1\% \text{ of rdg} + 2 \text{ digits})$	1mV		
TC  (excluding the accuracy of reference junction compensation)	R S B	$\pm(0.15\% \text{ of rdg} + 1^\circ\text{C})$ but R, S : 0 to $100^\circ\text{C}$ , $\pm 3.7^\circ\text{C}$ 100 to $300^\circ\text{C}$ , $\pm 1.5^\circ\text{C}$ B : 400 to $600^\circ\text{C}$ , $\pm 2^\circ\text{C}$ , and is not guaranteed below $400^\circ\text{C}$	0.1 $^\circ\text{C}$	$\pm$ Measurement accuracy $\pm 0.3\%$ of recording span	Pen model dead band: 0.2% of recording span  Dot printing model resolution: 0.1mm
	K	$\pm(0.15\% \text{ of rdg} + 0.7^\circ\text{C})$ but $-200$ to $-100^\circ\text{C}$ $\pm(0.15\% \text{ of rdg} + 1^\circ\text{C})$			
	E J T	$\pm(0.15\% \text{ of rdg} + 0.5^\circ\text{C})$ but J : $-200$ to $-100^\circ\text{C}$ $\pm(0.15\% \text{ of rdg} + 0.7^\circ\text{C})$			
	N	$\pm(0.15\% \text{ of rdg} + 0.7^\circ\text{C})$			
	W	$\pm(0.15\% \text{ of rdg} + 1^\circ\text{C})$			
	L U	$\pm(0.15\% \text{ of rdg} + 0.5^\circ\text{C})$ but L : $-200$ to $-100^\circ\text{C}$ $\pm(0.15\% \text{ of rdg} + 0.7^\circ\text{C})$			
	WRe	$\pm(0.2\% \text{ of rdg} + 1.0^\circ\text{C})$			
RTD	Pt100 JPt100	$\pm(0.15\% \text{ of rdg} + 0.3^\circ\text{C})$	0.1 $^\circ\text{C}$	$\pm$ Measurement accuracy $\pm 0.3\%$ of recording span	Pen model dead band: 0.2% of recording span Dot printing model resolution: 0.1mm

NOTE: Recording span is 100 mm.

\*including the measurement accuracy at linear scaling.

### Accuracy in case of scaling:

Accuracy during scaling (digits) =

measuring accuracy (digits)  $\times$  multiplier

+ 2 digits

(rounded up)

Where the multiplier = scaling span digits /

recording span digits

### Example:

DCV 6V range

recording span : 1.000 to 5.000V

scaling span : 0.000 to 2.000

measuring accuracy =  $\pm(0.3\% \times 5V + 2 \text{ digits})$

$\pm(0.015V (15 \text{ digits}) + 2)$

$\pm(17 \text{ digits})$

multiplier = 2000 digits (0.000 to 2.000 / 4000 digits

(1.000 to 5.000V) = 0.5

Accuracy during scaling = 17 digits  $\times$  0.5 + 2

= 11 digits

(rounded up)

### Maximum Allowable Input Voltage:

$\pm 10\text{VDC}$  (cont.) for less than 200mVDC ranges

and TC, RTD, DI ranges

$\pm 60\text{VDC}$  (cont.) for more than 2VDC

### Reference Junction Compensation:

INT / EXT selectable (per channel)

### Reference Junction Compensation Accuracy (above $0^\circ\text{C}$ ):

Type R, S, B, W, WRe:  $\pm 1^\circ\text{C}$

Type K, J, E, T, N, L, U:  $\pm 0.5^\circ\text{C}$

### Input Resistance:

More than  $10\text{M}\Omega$  (TC, 20mV, 60mV, 200mV range)

Approx.  $1\text{M}\Omega$  (More than 2V range).

### Input Source Resistance:

DCV, TC:  $2\text{k}\Omega$  or less

RTD:  $10\Omega$  or less / wire (The resistance of all three wires must be equal)

### Input Bias Current:

Less than 10nA (except when burnout is specified).

### Maximum Common Mode Noise Voltage:

250VAC rms (50 / 60Hz)

Maximum Differential Noise between Channels:  
 250VAC rms (50 / 60Hz)  
 200VAC rms (50 / 60Hz, for the mode / with / N2 option)  
 Interference between Channels:  
 120dB (Input external resistance 500Ω, the deviation in the case that 60V is applied to another channel)  
 Common Mode Rejection Ratio:  
 120dB (50/60Hz  $\pm$  0.1%, 500Ω imbalance between '–' terminal and ground)  
 Normal Mode Rejection Ratio:  
 40dB (50 / 60Hz  $\pm$  0.1%)

### Effect of Operating Conditions

#### Effect of Ambient Temperature:

Effect of ambient temperature variation of 10°C.  
 Digital display: Within  $\pm$  (0.1% of rdg+1 digit)  
 Recording: Within Digital display  $\pm$  0.2% of recording span (excluding RJC error)

#### Effect of Power Supply:

Effect of variation within 90 to 264VAC in rated power supply voltage:  
 (50 or 60Hz)  
 Digital display: Within  $\pm$  1 digit  
 Recording: Within  $\pm$  0.1% of recording span  
 Effect of rated power frequency variation of  $\pm$  2Hz (at 100VAC):  
 Digital display: Within  $\pm$  (0.1% of rdg+1 digit)  
 Recording: Same as digital display

#### Effect of Magnetic Field:

Effect of AC (50 / 60Hz) or DC 400AT/m field:  
 Digital display: Within  $\pm$  (0.1% of rdg+10 digits)  
 Recording: Less than  $\pm$  0.5% of recording span

#### Effect of Input Source Resistance:

Effect of Input Source Resistance variation of +1kΩ :  
 DCV range:  
 Ranges less than 200mV: Within  $\pm$  10  $\mu$ V  
 Ranges more than 2V: Within  $\pm$  0.1% of rdg  
 TC range:  
 Within  $\pm$  10  $\mu$ V  
 RTD range:  
 - Effect of 10Ω per wire (resistances of three wires must be equal):  
 Digital display: Within  $\pm$  (0.1% of rdg+1 digit)  
 Recording: Within Digital display  $\pm$  0.1% of recording span  
 - Effect of difference of three wires:  
 Digital display: 0.1°C per 40 mΩ (approx.) for Pt100 range.

#### Effect of Operating Position:

Digital display: Within  $\pm$  (0.1% of rdg+1 digit) (within 30° backwards)  
 Recording: Within Digital display  $\pm$  0.1% of recording span (within 30° backwards)

#### Vibration:

Effect when sine-wave motion of frequency 10 to 60Hz and acceleration of 0.2m/s<sup>2</sup> is applied to the instrument in the direction of three axes for two hours:  
 Digital display: Within  $\pm$  (0.1% of rdg+1 digit)  
 Recording: Within Digital display  $\pm$  0.1% of recording span

### Transport and Storage Conditions

No malfunction will occur under these conditions, however when returning to normal operation conditions, calibration might be necessary.  
 Temperature:  $-25^{\circ}\text{C}$  to  $60^{\circ}\text{C}$   
 Humidity: 5 to 95% RH (no condensation)  
 Vibration: 10 to 60Hz, 4.9m/s<sup>2</sup>  
 Shock: Less than 392m/s<sup>2</sup> (while being packed)

### Contents of $\mu$ R10000 firmware version change (R1.11)\*

1. Date display type for printout/display: Selectable from below table

Format	Printout/display example	Remark
yy/mm/dd	2005/08/31	Additional format
mm/dd/yy	08/31/2005	
dd/mm/yy	31/08/2005	
dd.mm.yy	31.08.2005	
mm.dd.yy	Aug.31.2005	Default (same as before)

2. Available for replacing ribbon cassette with power ON for dot models.  
 - Ribbon cassette replacement function is added within FUNC key operation.  
 - Available for keylock on to ribbon cassette replacement function.
3. /C3: RS-422A/485communication interface Protocol: Modbus/RTU SLAVE (2-wire)
4. DST Setting method  
 Month, day of week, and week number are set.

\*: The settings of above alteration can not be done with configuration software (RXA10: R1.02 or before).

### ■ OPTIONAL SPECIFICATIONS

#### /A1: Alarm Output Relay (2 contacts)

#### /A2: Alarm Output Relay (4 contacts)

#### /A3: Alarm Output Relay (6 contacts)

When alarm occurs, output relay on rear terminal will be activated.  
 - AND / OR selectable.  
 - Energized/ deenergized selectable (common for all relays).  
 - Hold type/ non-hold type selectable (common for all relays).  
 - Reflash relay:  
 Alarms can be assigned to an output relay (I01-I03)  
 - Relay contact rating: DC 250V / 0.1A  
 AC 250V / 3A  
 - Type of relay output: NO-C-NC

#### Note : Alarm ACK key:

##### Non-Hold type:


No effect when ALARM ACK-key is pressed (no effect on output relay).

##### Hold type:


When ALARM ACK-key is pressed, the output relay will be reset.



Non-hold-type:

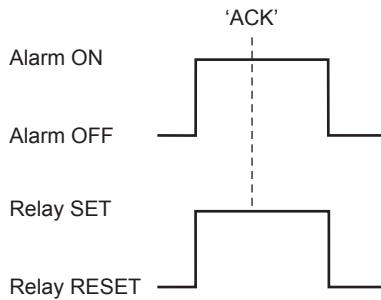


Hold-type:

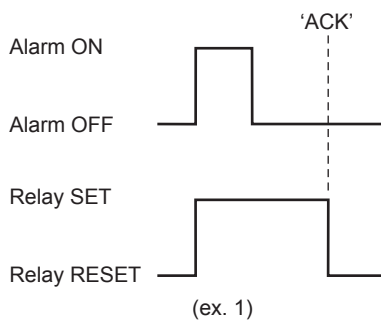

F02.ai

Hold-type:

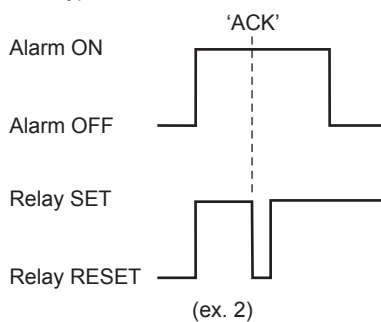

F03.ai

### /C3: RS-422A / 485 Communication Interface

By using this communication function, setting and control of data can be done by a host-computer. Data can also be output to the host-computer.

- Synchronization method:  
start-stop asynchronous transmission
- Specifications:  
Conform to EIA RS-422A / 485 standard
- Communication method:  
4-wire half-duplex multi-drop connection  
(1: N (N=1 to 32))
- Transfer rate:  
1200, 2400, 4800, 9600, 19200, 38400bps
- Data length: 7 or 8 bit
- Stop bit: 1 bit
- Parity: Odd, even or none
- Communication distance: Up to 1.2km
- Communication mode:  
ASCII (control / setting / measured data) or  
Binary (measured data)
- Modbus: RTU SLAVE

### /C7: Ethernet Interface

Electrical and mechanical specifications:

- Conforms to IEEE 802.3
- Transmission media: 10 Base-T
- Protocol: TCP, IP, UDP, ICMP, ARP

### /H2: Clamped Input Terminal

Using clamped input terminals as input terminal.

### /H3: Non-glare Door Glass

Provides non-reflective glass in the front door.

### /H5[ ]: Portable Type

Provides carrying handle and power code. (cable length: approx. 2m, 3 pin plug)

### /M1: Mathematical Functions

- Computation channel recording  
Pen model: Measurement and computation channel can be assigned to 1-4pen.  
Dot model: ON/OFF selectable for each channel
- Zone recording  
Partial expanded recording
- Alarm for computation channel  
Number of levels: Up to four levels for every channel (High and low limits, delay High and low)
- Number of computation channel: 8 (pen model)  
12 (dot model)
- Computation expression: Up to 120 characters can be used
- Types:  
Four arithmetic operations, square root, absolute, common logarithm, exponential, power, relational operations (>, ≥, <, ≤, =, ≠),  
logic operations (AND, OR, NOT, XOR)
- Constant\*1: Up to 30 constants can be used
- Communication digital input\*1:  
Pen model: 8 channels  
Dot model: 12 channels
- Remote input\*1: Up to 5 remote inputs status(I/O) can be used in computation expression

\*1 It cannot be used in statistical computation expression.

### Statistical computation

The following computation can be executed for the specified internal timer

- Types of statistics: MAX, MIN, AVE, SUM, MAX-MIN (Totalization)
- Type of internal timer: 3 types  
Timer types: Internal of periodic printout, absolute time, relative time

### /N1: Cu10, Cu25 RTD input

This option allows Cu10 and Cu25 RTD inputs to be added to the standard input types.

## Cu10, Cu25 Measurement Range

	Input Type	Measurement Range
RTD	Cu10(GE) Cu10(L&N) Cu10(WEEP) Cu10(BAILEY) Cu10 : $\alpha = 0.00392$ at 20°C Cu10 : $\alpha = 0.00393$ at 20°C Cu25* : $\alpha = 0.00425$ at 0°C	-200 to 300°C (-328 to 572°F)

\*Measuring current  $i = 1\text{mA}$ 

## Measurement / Recording Accuracy

Input Type	Measurement Accuracy	Recording Accuracy
Cu10(GE) Cu10(L&N) Cu10(WEEP) Cu10(BAILEY) Cu10 : $\alpha = 0.00392$ at 20°C Cu10 : $\alpha = 0.00393$ at 20°C	$\pm(0.4\% \text{ of rdg} + 1.0^\circ\text{C})$	$\pm$ Measurement accuracy $\pm 0.3\%$ of recording span
Cu25 : $\alpha = 0.00425$ at 0°C	$\pm(0.3\% \text{ of rdg} + 0.8^\circ\text{C})$	

## /N2: 3 Leg Isolated RTD Input

A, B, b legs are isolated input type

## /N3: Expansion Inputs

This option allows 14 types inputs such as Pt50, PR40-20, PLATINEL inputs to be supported besides the standard input types.

## /N3 Measurement Range

Input	Measuring Range
TC (Excluding RJC accuracy)	
PR40-20	0.0 to 1900.0°C 32 to 3452°F
PLATINEL	0.0 to 1400.0°C 32 to 2552°F
NiNiMo	0.0 to 1310.0°C 32 to 2390°F
W/WRe26	0.0 to 2400.0°C 32 to 4352°F
Type N (AWG14)	0.0 to 1300.0°C 32 to 2372°F
Kp vs Au7Fe	0.0 to 300.0K —
RTD (Measuring contact $i = 1\text{mA}$ )	
Pt25	-200.0 to 550.0°C -328.0 to 1022.0°F
Pt50	-200.0 to 600.0°C -328.0 to 1112.0°F
Ni100(SAMA)	-200.0 to 250.0°C -328.0 to 482.0°F
Ni100(DIN)	-60.0 to 180.0°C -76.0 to 356.0°F
Ni120	-70.0 to 200.0°C -94.0 to 392.0°F
J263*B	0.0 to 300.0K —
Cu53	-50.0 to 150.0°C -58.0 to 302.0°F
Cu100*1	-50.0 to 150.0°C -58.0 to 302.0°F

\*1: Cu100:  $\alpha = 0.00425$  at 0°C

Following specifications apply to operation of the recorder under standard operation conditions:

temperature  $23 \pm 2^\circ\text{C}$ , humidity  $55 \pm 10\%\text{RH}$ , power supply voltage 90 to 132V, 180 to 264V AC, power supply frequency 50/60Hz  $\pm 1\%$ , warm-up time at least 30 minutes, other ambient conditions like vibration should not adversely affect the recording operation

Reference junction compensation accuracy

When the input terminal temperature is balanced (at least 60 minutes after power-on)  
PLATINEL, NiNiMo, W/WRe26, Type N (AWG14):  $\pm 1.0^\circ\text{C}$   
PR40-20, KpvsAu7Fe: Without reference junction compensation (fixed at 0°C)

## Measurement / Recording Accuracy

Input	Measuring Accuracy	Recording Accuracy
PR40-20*1	0 to 450°C Not guaranteed 450 to 750°C $\pm(0.9\% \text{ of rdg} + 3.2^\circ\text{C})$ 750 to 1100°C $\pm(0.9\% \text{ of rdg} + 1.3^\circ\text{C})$ 1100 to 1900°C $\pm(0.9\% \text{ of rdg} + 0.4^\circ\text{C})$	$\pm$ Measurement accuracy $\pm 0.3\%$ of recording span
PLATINEL	$\pm(0.25\% \text{ of rdg} + 2.3^\circ\text{C})$	
NiNiMo	$\pm(0.25\% \text{ of rdg} + 0.7^\circ\text{C})$	
W/WRe26	0 to 400°C within $\pm 15.0^\circ\text{C}$ 400 to 2400°C $\pm(0.2\% \text{ of rdg} + 2.0^\circ\text{C})$	
Type N (AWG14)	$\pm(0.2\% \text{ of rdg} + 1.3^\circ\text{C})$	
Kp vs Au7Fe	0 to 20K $\pm 4.5\text{K}$ 20 to 300K $\pm 2.5\text{K}$	
Pt25	$\pm(0.15\% \text{ of rdg} + 0.6^\circ\text{C})$	
Pt50	$\pm(0.3\% \text{ of rdg} + 0.6^\circ\text{C})$	
Ni100(SAMA) Ni100(DIN) Ni120	$\pm(0.15\% \text{ of rdg} + 0.4^\circ\text{C})$	
J263*B	0 to 40K $\pm 3.0\text{K}$ 40 to 300K $\pm 1.0\text{K}$	
Cu53	$\pm(0.15\% \text{ of rdg} + 0.8^\circ\text{C})$	
Cu100	$\pm(0.2\% \text{ of rdg} + 1.0^\circ\text{C})$	

\*1: PR40-20 : No reference junction compensation (0°C fix)

## /P1 : 24VDC/AC Power Supply

Rated power supply: 24VDC/AC

Allowable power supply voltage range:

21.6 to 26.4 VDC/AC

Dielectric strength:

Power supply to ground terminal: 1000VAC

Power Consumption:

(approx.)

Supply Voltage	1-4 pen	6 dot	Max.
24VDC	7VA*	8VA*	25VA
24VAC (50/60Hz)	13VA*	13VA*	35VA

\* In Balance

## /R1: Remote Control

5 are selectable from the below mentioned remote controls.

	Number of settings	Signal
Recording start / stop	1	edge
Chart speed change	1	level
Message printout start*1	5	trigger
Manual printout start	1	trigger
Alarm ACK	1	trigger
Time adjustment	1	trigger
(Adjusting the time to a preset time)		
Computation start / stop*2	1	edge
Computation reset*2	1	trigger
Batch comment switch*3	1	level
Priority remote recording*3	1	level
Data save On/Off	1	level

\*1 Up to 5 messages can be set

\*2 /M1 option is necessary

\*3 Available for the model with /BT1 option

Input type: Isolated from the main circuit through a photocoupler, built-in isolated power supply for the input terminals, and shared common.

Input type and signal level:

Voltage-free contact

Contact close at 200  $\Omega$  or less and contact open at 100 k $\Omega$  or greater.

**Open collector**

ON voltage: 0.5 V or less (sink current 30 mA or more), leakage current when OFF: 0.25 mA or less

Allowable input voltage: 5 VDC

Signal type: edge, Level, or trigger (250 ms or more)

**/CC1: Calibration correction**

Corrects the measurement value of each channel using segment linearizer approximation.

Number of segment points: 2 to 16

Setting method: Bias, Absolute value

Target Channel: Measurement channel

Target range:

Input range (DCV, TC, RTD)

Linear scaling range (DCV, TC, RTD, 1-5V)

But, DI, Differential computation and square root are not included.

**/BT1: Header printout**

Batch name, comment, time, chart speed are printed in record Start/Stop.

Message printout including measured value/computation value is available.

The pen offset compensating data can be ejected after recording stops.

- Printout contents:

Batch name: Batch number-Lot number  
(ON/OFF selectable)

Batch number: Up to 26 characters can be set

Lot number: 4 digits/6 digits/OFF selectable

Start/Stop comment:

Up to 32 characters × 5 lines can be set

Start/Stop time: ON/OFF selectable

Start/Stop chart speed: ON/OFF selectable

- Message printout:

Printout contents

(message format: ON/OFF selectable)

ON: any (date/time, message (up to 16 characters), measured value) can be selected (up to 35 characters)

OFF: Date/time + message (up to 16 characters)

**/EM1: SD Memory Card**

SD memory cards can be used as external storage media.

Measured data can be saved (The  $\mu$ R10000 does not support FIFO function (overwrite function)) and replayed (only for dot model), and setting parameters can be saved and loaded.

Media: SD card (SD/SDHC) (up to 32 GB)

Format: FAT32 or FAT16

Note: /EM1 modification is not available.

**■ APPLICATION SOFTWARE**

With Ethernet (/C7), RS-422A/485 (/C3), or Interface unit,  $\mu$ R10000 setting can be configured.

**• RXA10 Configuration Software**

System requirements

OS: Windows 8.1 Update (32-bit and 64-bit editions, desktop mode), Windows 8.1 Pro Update (32-bit and 64-bit editions, desktop mode) / Windows 10 Home (32-bit and 64-bit editions) / Windows 10 Pro (32-bit and 64-bit editions) / Windows 10 Enterprise (32-bit and 64-bit editions) / Windows 10 Enterprise LTSC (32-bit and 64-bit editions) / Windows 10 Enterprise LTSC (32-bit and 64-bit editions) / Windows 11 Home (64-bit editions) / Windows 11 Pro (64-bit editions) / Windows 11 Enterprise (64-bit editions)

Yokogawa will also stop supporting OSs that Microsoft Corporation no longer supports.

Processor:

CPU, Memory:

Windows 8.1, Windows 10:

Intel Core2 Duo E6300 or faster x64 or x86, 2 GB or more

Windows 11:

Core-i5 or faster and 8th generation later Intel processor, 8 GB or more

Hard disk: 100 MB or more (Windows 8.1, Windows 10), 64 GB or more (Windows 11) of free space

CD-ROM drive: A CD-ROM drive supported by the OS.

Mouse: A mouse supported by the OS.

Monitor:

OS compatible display

1024 x 768 dots or higher, 65536 colors or more recommended

Main functions (as a package):

Configuration software:

Configuration via communication:

Configures the station, excluding the communication setting, or sets it in set mode.

**• Interface unit (attached with RXA10 configuration software)**

Method of power supply: Power supply from  $\mu$ R10000

Connector type: D-Sub 9-pin plug (male)

Electrical and mechanical specifications:


Conforms to EIA-574 (9-pin EIA-232 (RS232)) RS422A/485 communication interface (/C3) and interface unit cannot work together.

- **Universal Viewer (free download)**

Data files saved on the SD memory card can be loaded and displayed. For specified data, you can also perform statistical computation over an area and export to ASCII, Excel, or other formats.

<http://www.yokogawa.com/ns/>

#### Displaying waveforms with the Viewer

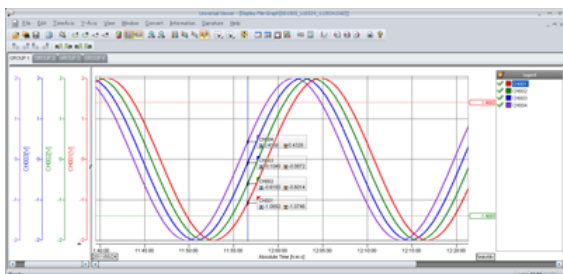

**Model Codes**

Model Code	Suffix Code	Option Code	Description
<b>436101</b>			μR10000 1 pen recorder
<b>436102</b>			μR10000 2 pen recorder
<b>436103</b>			μR10000 3 pen recorder
<b>436104</b>			μR10000 4 pen recorder
<b>436106</b>			μR10000 6 dot recorder
Language	<b>-2</b>		English/German* <sup>9</sup> /French* <sup>9</sup> , degF & DST
Option		<b>/A1</b>	Alarm output relay (2 contacts)* <sup>1</sup>
		<b>/A2</b>	Alarm output relay (4 contacts)* <sup>1</sup>
		<b>/A3</b>	Alarm output relay (6 contacts)* <sup>1</sup>
		<b>/BT1</b>	Header printout
		<b>/C3</b>	RS-422A/485 communication interface * <sup>2</sup> , * <sup>3</sup>
		<b>/C7</b>	Ethernet communication interface * <sup>2</sup>
		<b>/CC1</b>	Calibration Correction
		<b>/EM1</b>	SD memory card * <sup>3</sup>
		<b>/H2</b>	Clamped input terminal * <sup>4</sup>
		<b>/H3</b>	Non-glare door glass
		<b>/H5[ ]</b> * <sup>8</sup>	Portable Type * <sup>7</sup>
		<b>/M1</b>	Computation function
		<b>/N1</b>	Cu10, Cu25 inputs
		<b>/N2</b>	3 legs Isolated RTD * <sup>4</sup> , * <sup>5</sup>
		<b>/N3</b>	Expansion inputs * <sup>6</sup>
		<b>/P1</b>	24VDC/AC power supply * <sup>7</sup>
		<b>/R1</b>	Remote control 5 contacts

Model Code	Description	OS
RXA10-01	RXA10 Configuration software*	Windows 8.1/10/11
RXA10-02	RXA10 Configuration software* (With interface unit)	Windows 8.1/10/11

\*This software applies for Windows 8.1 from R3.05.01 version.

This software applies for Windows 10 from R3.05.02 version.

This software applies for Windows 10 Enterprise and Windows 11 from R3.06.03 version.

#### Notes on using the RXA10 Configuration Software

When the /EM1 recorder option is specified, the interface unit supplied with the RXA10 Configuration Software cannot be used. Either specify the /C7 recorder option (Ethernet interface) and communicate via Ethernet, or save the μR settings to an SD memory card and load them from the PC.

\*1: Only one of /A1, /A2, /A3 can be selected

\*2: /C3 and /C7 can not be specified together

\*3: /C3 and /EM1 can not be specified together.

\*4: /H2 and /N2 can not be specified together

\*5: /N2 can be specified only for dot model

\*6: 14 types inputs: Pt50 RTD, PR40-20, PLATINEL TC etc.

\*7: /H5[ ] and /P1 can not be specified together

\*8: /H5[ ] (D-power cord UL, CSA, st'd, F-Power cord VDE st'd, R-Power cord SAA st'd, J-Power cord BS st'd, H-Power cord GB st'd)

\*9: Available from firmware version R1.21

## STANDARD ACCESSORIES

Name		1 pen	2 pen	3 pen	4 pen	6 dot
Z-fold chart		1	1	1	1	1
6 color ribbon cassette		—	—	—	—	1
Disposable felt-pen cartridge	Red	1	1	1	1	—
	Green	—	1	1	1	—
	Blue	—	—	1	1	—
	Violet	—	—	—	1	—
Plotter pen	Purple	1	1	1	1	—
SD memory card (1GB) (In case /EM1 is specified)		1	1	1	1	1
Mounting brackets		2	2	2	2	2
Operation Manual		1	1	1	1	1

## SPARES/OPTIONAL ACCESSORIES

Name		Model Code (Parts No.)	Specification
Z-fold chart		B9565AW	10 (sales unit)
6 color ribbon cassette		B9901AX	1 (sales unit)
Disposable felt-pen cartridge	Red	B9902AM	1 (sales unit, 3 pieces/unit)
	Green	B9902AN	1 (sales unit, 3 pieces/unit)
	Blue	B9902AP	1 (sales unit, 3 pieces/unit)
	Violet	B9902AQ	1 (sales unit, 3 pieces/unit)
Plotter pen	Purple	B9902AR	1 (sales unit, 3 pieces/unit)
SD memory card (1GB)		773001	1 (sales unit)
Mounting brackets		B9900BX	2 (sales unit)
Shunt resistor	(for screw input terminal)	4159 20	250Ω ±0.1%
		4159 21	100Ω ±0.1%
		4159 22	10Ω ±0.1%
	(for clamped input terminal)	4389 20	250Ω ±0.1%
		4389 21	100Ω ±0.1%
		4389 22	10Ω ±0.1%

## ■ Basic Conditions and Individual Contracts at the Time of Purchase

The warranty for this product is defined in the basic conditions and individual contracts at the time of purchase. The individual conditions are as follows.

- **Validation**  
Yokogawa does not guarantee the final outcome of validation work even if there is a defect in the product. For the warranty of validation services, please contact the company that performed the validation work.
- **Warranty period of firmware**  
The firmware warranty period is one year.

## Documents and Downloads

You can download the latest various documents from the following website.

<http://www.yokogawa.com/ns/mr/im/>


- Microsoft, MS and Windows are registered trademarks of Microsoft Corporation USA.
- Modbus is a registered trademark of AEG Schneider
- Other company and/or product names are registered trade mark of their manufactures.

**NOTE: Compatibility with Input Terminals and Option Terminals of Older Models**

The input and option terminals of this instrument are specific to this instrument. Do not connect to the input terminals or option terminals of the  $\mu R1000$ , or other models as malfunction can result.




## REAR TERMINAL ARRANGEMENTS

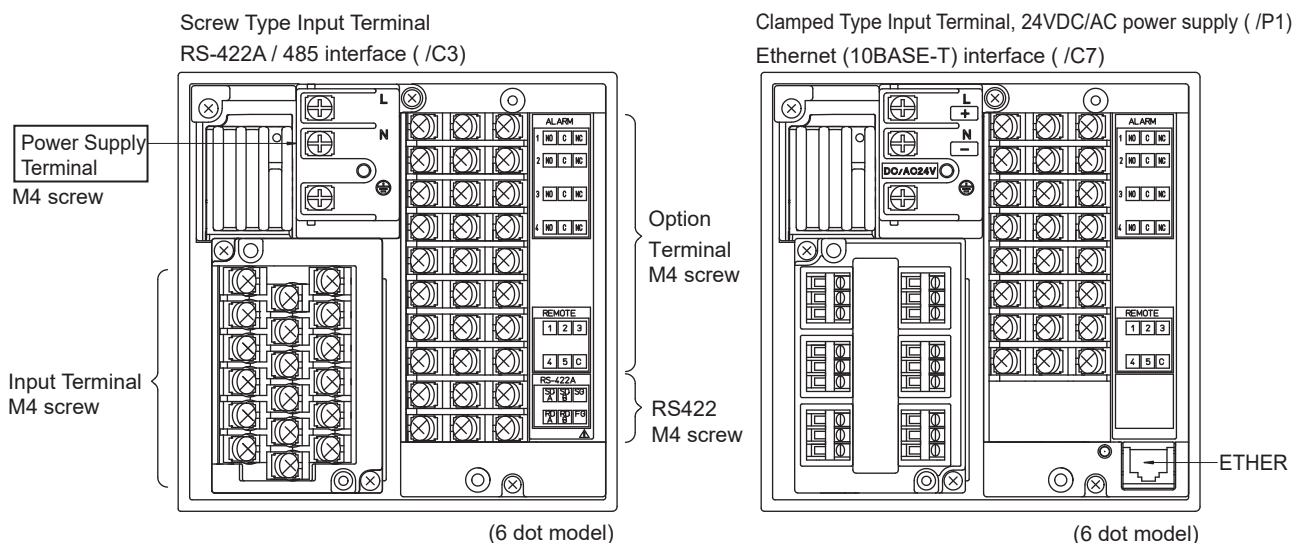


If /C7 is specified and /A□ and /R1 are not specified, the function of the accessory screw terminal block is not available.

### Input Terminals


#### 4 Pen Screw Type




#### 6 Dot Screw Type



#### 4 Pen Clamped Type (/H2)




#### 6 Dot Clamped Type (/H2)




### Option Terminals


#### /A1/R1 Combination

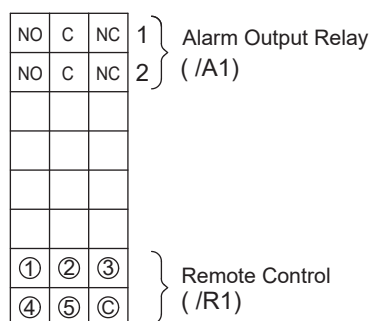

#### /A2/R1 Combination

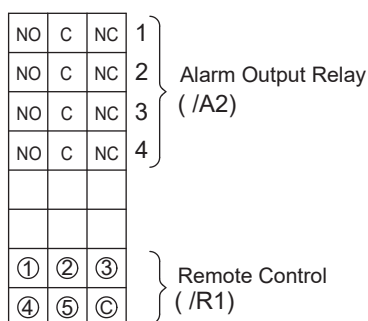


#### /A3/R1 Combination

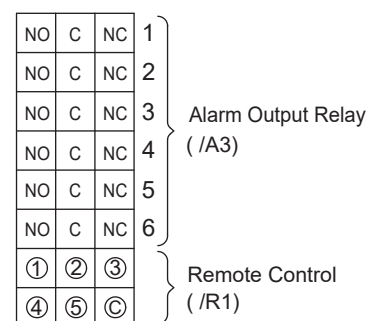


F04.ai

## DIMENSION


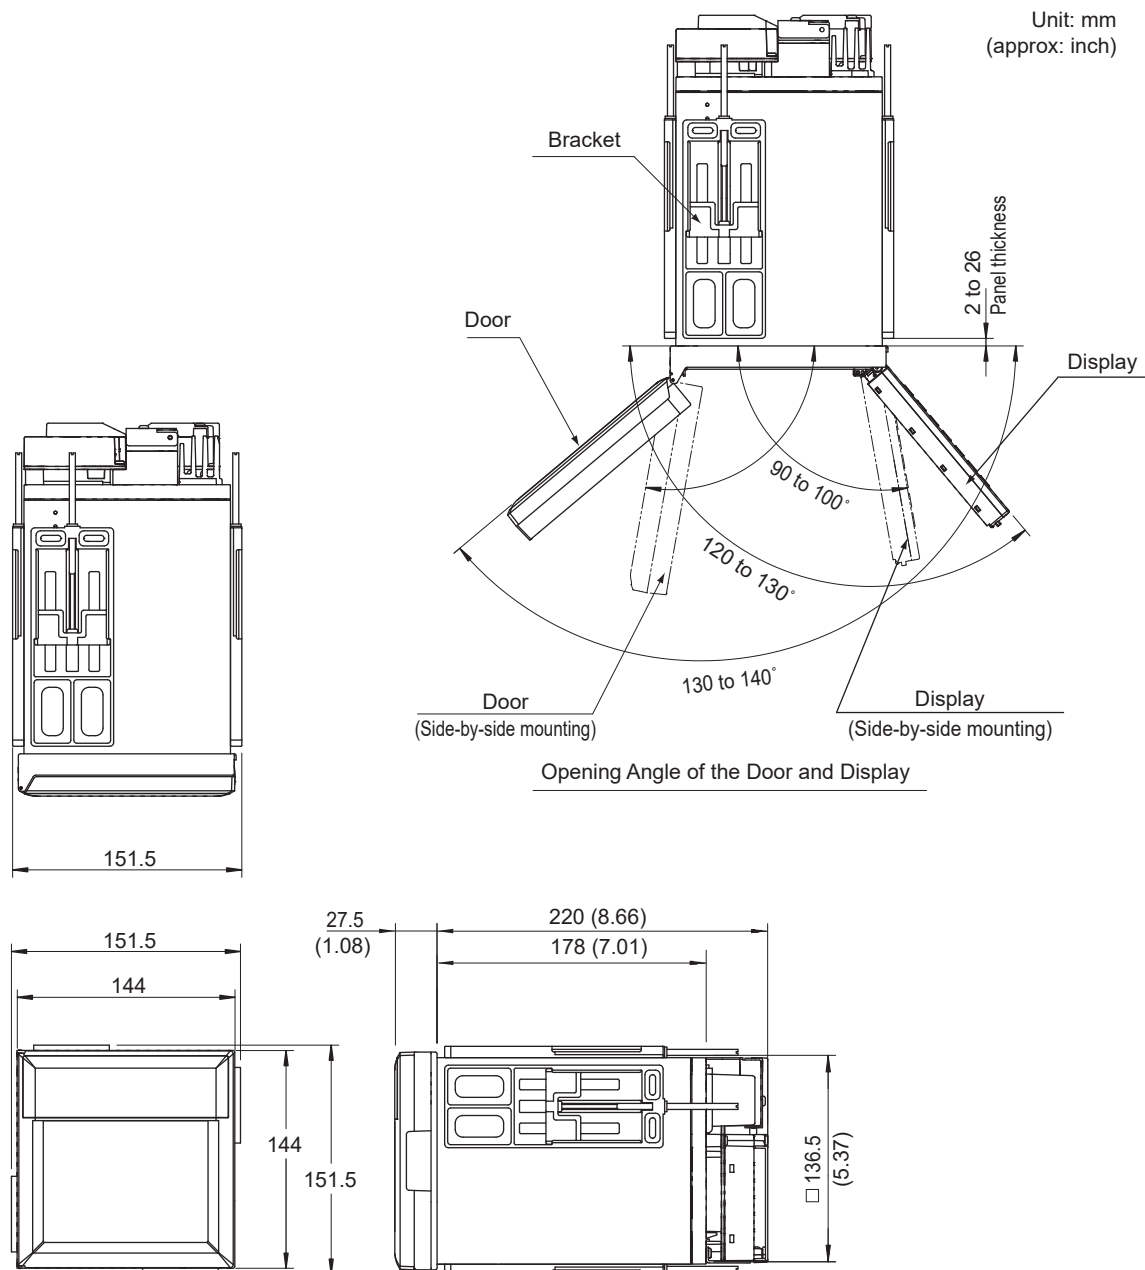


Note: If not specified, the tolerance is  $\pm 3\%$ . However, in case of less than 10 mm the tolerance is  $\pm 0.3$  mm.


F05.ai

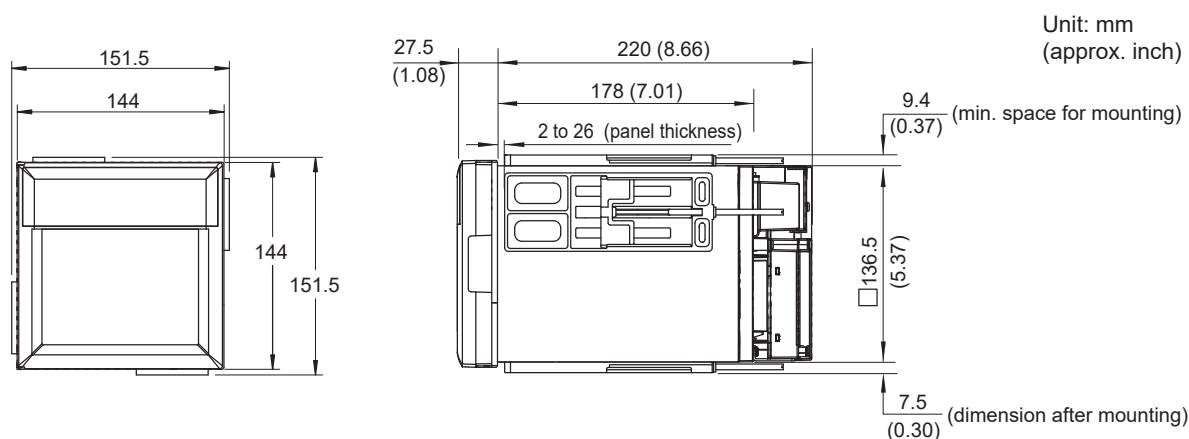**PANEL CUTOUT & SPACING**

Note: The  $\mu$ R10000 should be mounted by only two brackets, either on the top & bottom of the recorder, or on the left & right side of the recorder.

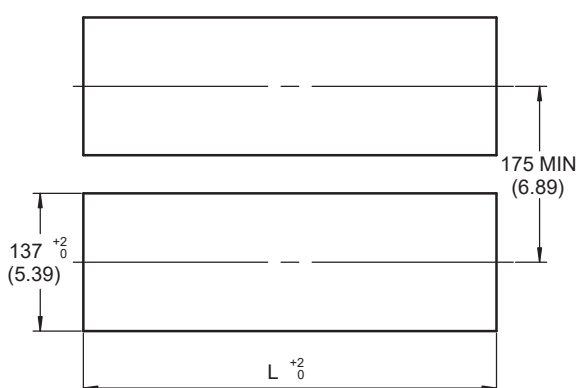**Single-Unit Mounting****Side-by-Side Mounting (horizontally)**

Units	$L \begin{smallmatrix} +2 \\ 0 \end{smallmatrix}$ (mm)
2	282
3	426
4	570
5	714
6	858
7	1002
8	1146
9	1290
10	1434
n	$(144 \times n) - 6$

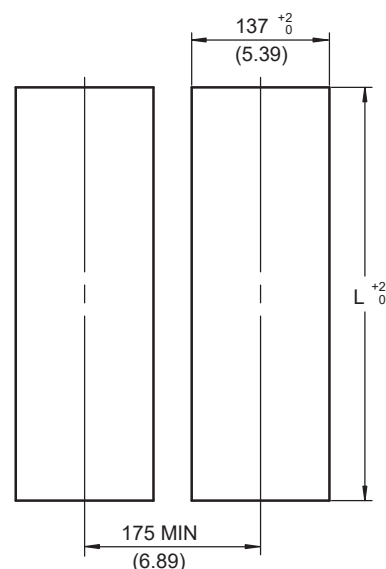**Side-by-Side Mounting (vertically,max.3units)**



Weight:  
 4361 01: 2.1kg  
 4361 02: 2.2kg  
 4361 03: 2.3kg  
 4361 04: 2.4kg  
 4361 06: 2.5kg

Note: If not specified, the tolerance is 3%. However, in cases of less than 10 mm, the tolerance is 0.3 mm.

F06.ai

**NOTE: Compatibility with Input Terminals and Option Terminals of Older Models**

The input and option terminals of this instrument are specific to this instrument. Do not connect to the input terminals or option terminals of the  $\mu$ R1000, or other models as malfunction can result.

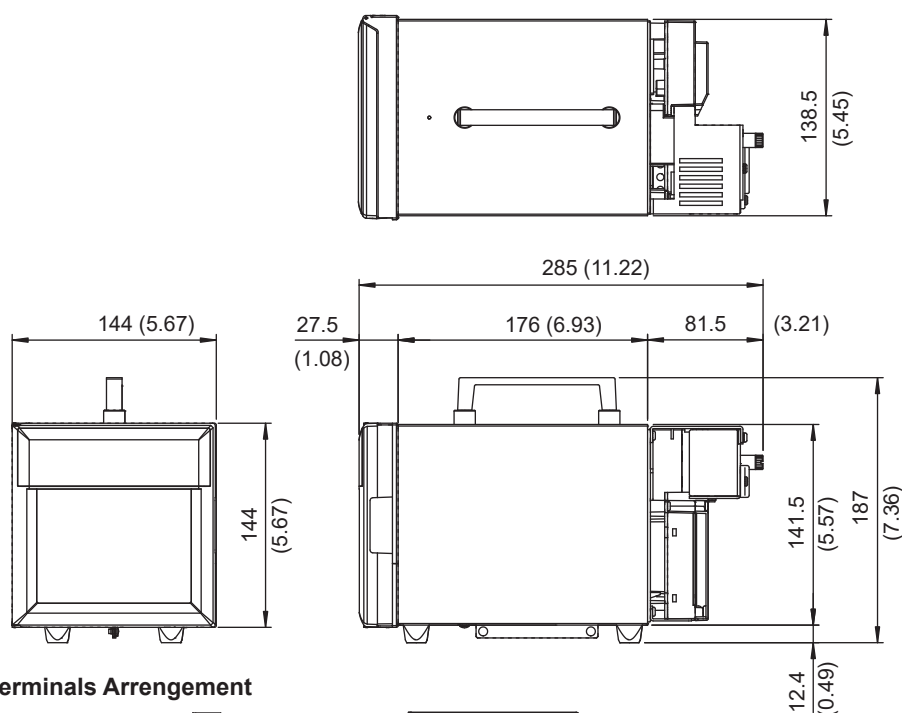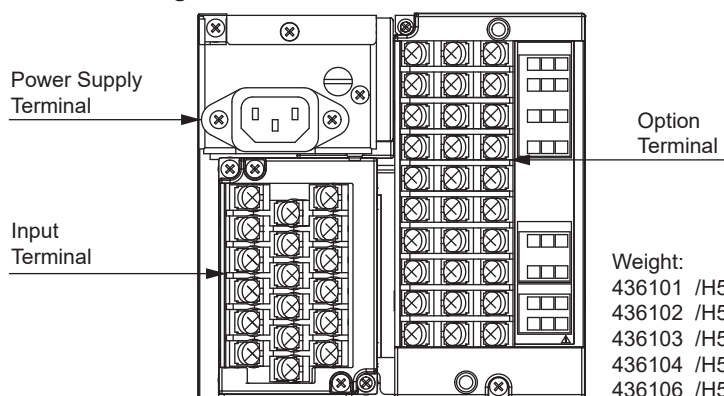**DIMENSION (Portable Type)**Unit: mm  
(approx. inch)**Terminals Arrangement**


Weight:

436101 /H5	: Approx. 3.1kg
436102 /H5	: Approx. 3.2kg
436103 /H5	: Approx. 3.3kg
436104 /H5	: Approx. 3.4kg
436106 /H5	: Approx. 3.5kg

Note: make sure to use the appropriate power cord, matching the power outlet.  
If not specified, the tolerance is  $\pm 3\%$ . However, in cases of less than 10 mm, the tolerance is  $\pm 0.3$  mm.

F07.ai


## Relationship between Bezel Height of Peripheral Equipment and Space between Measurement Instruments

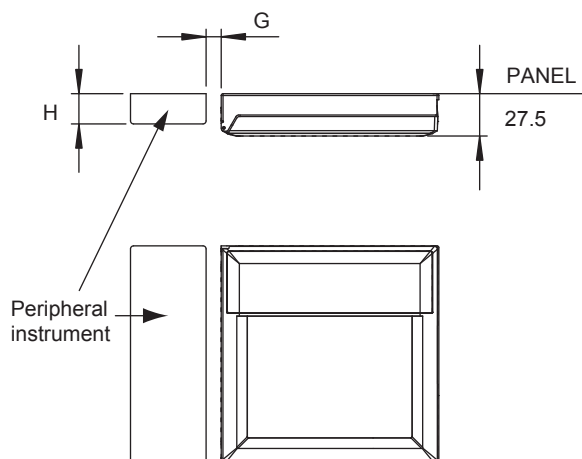

(In case mounted at the left side of  $\mu R10000$ )

Height of Bezel from Panel Less than H (mm)	Space More than G (mm)
20	0
24	1
28	2
32	3
More than 36 unlimited	4

Note: For instruments which do not have taper and angle R

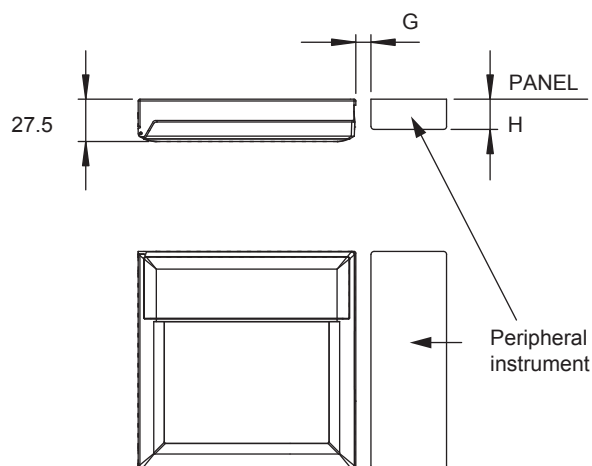


(In case mounted at the right side of  $\mu R10000$ )

Height of Bezel from Panel ; H (mm)	Space ; G (mm)
less than 23.5	0
more than 23.5	more than 3

Note: For instruments which do not have taper and angle R

## Spacing for $\mu R10000$ and YS1000 when Mounted together

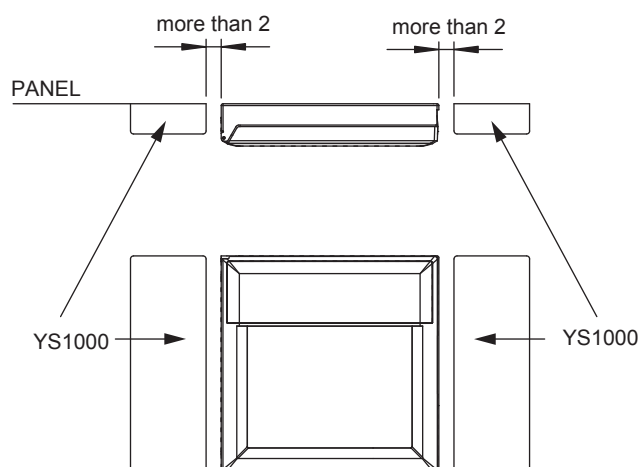

Mounting Place	Space ; G (mm)
Mount at the right side of YS1000	more than 2
Mount at the left side of YS1000	more than 2

F08.ai