



Temptronic

ECO-710E-WM THERMOSTREAM®

with WhisperStream quiet technology

-80° to +225°C

The ECO Series is designed for any environment where audible noise and heat dissipation are concerns. It operates on an energy-efficient, 20 amp, 50/60Hz circuit with proprietary technology delivering quiet, smooth sounding operation. Additionally, the system **does not require annual leak testing** because its gas charge is below the CO₂ equivalent limit for greenhouse gas emissions as specified by Regulation EU 517/2014.

These fast, precise temperature forcing systems provide effective testing and conditioning of electronic components, boards and modules. Built with proven ThermoStream reliability and supported worldwide.

PERFORMANCE:

Temperature Range* - No LN₂ or LCO₂ Required

-80 to +225°C

Transition Rate*

-55 to +125°C, approx. 10 seconds

125 to -55°C, approx. 10 seconds

System Airflow Output*

4 to 18scfm (1.9 to 8.5 l/s) Continuous

TEMPERATURE CONTROL:

Temperature Display & Resolution

+/- 0.1°C

Temperature Accuracy

1.0°C (when calibrated against NIST standard)

DUT Temperature Control

Proprietary control algorithm enables DUT temperature to be directly controlled

DUT Sensor Ports

Internal Diode, Thermocouples (T & K), RTD (100 Ohm platinum), Digital DUT



E Series Systems Equipped with Embedded Software Controls, Eliminating Windows® OS

- Significant reduction in security vulnerabilities
- Minimizes software and hardware obsolescence concerns
- Improved responsiveness of the touch screen
- Faster system boot and startup times

FEATURES:

ECO Friendly: **No Annual Leak Testing Required** per F-Gas Regulation EU 517/2014

- **20 Amp Operation:** Full performance with 20 amp service
- **Automatic Power Reduction:** Reduces power usage during idle periods
- **Heat Only Mode:** Reduces power usage when cold temperatures are not used

WhisperStream Technology: quieter, smooth-sounding operation, 56 dBA

Frost Free Test Environment: dry air purge for tester interface, prevents condensation:

0.5 to 3scfm (0.25 to 1.5 l/s)

Heated Defrost: quickly removes moisture buildup from internal chiller

- Fully adjustable thermal head
- Ethernet, IEEE-488, RS232, USB
- Embedded Control System
- Customizable & savable test setups
- Local & remote operations
- Datalog storage (USB)
- User defined temperature limits

APPLICATION OPTIONS:

Thermal Cap or FlexExtender Hose
5.5 inch ID Thermal Cap or optional FlexExtender Hose for connection to external Thermal Chambers or enclosures


MobileTemp™ Thermal Chambers
Temperature Chambers designed specifically for use with ThermoStream systems. See Additional Datasheets for details.

*Under nominal operating conditions
Ultimate high & low temperatures (±1°) achieved at 18scfm




inTEST Thermal Solutions
an inTEST Company

info@inTESTthermal.com | 1.781.688.2300
41 Hampden Road | Mansfield, MA 02048 USA

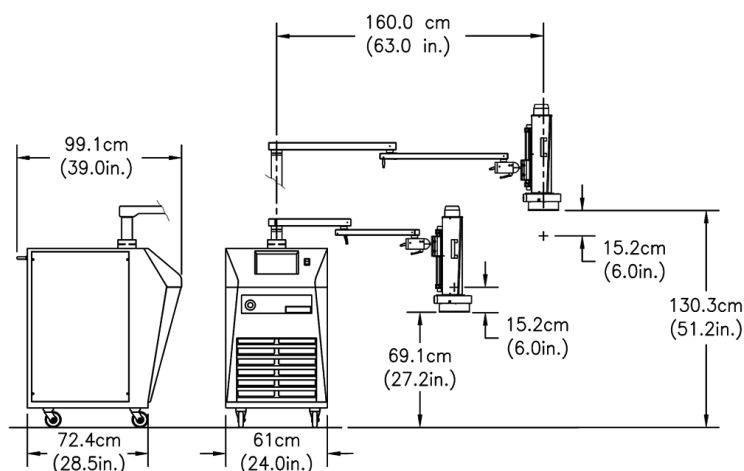

**SYSTEM DIMENSIONS
STANDARD**

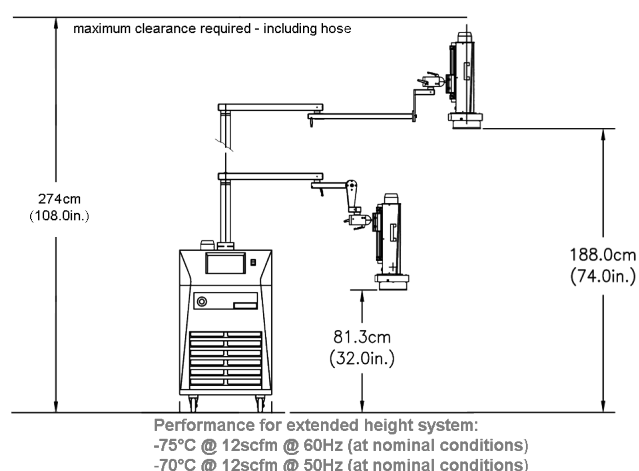

**SYSTEM DIMENSIONS
EXTENDED HEIGHT**

FACILITY REQUIREMENTS

Power ¹	200 - 250 VAC (230V nominal), 50/60Hz 20 amp, 1phase
FACILITY WATER SUPPLY²	
Cooling Water	3.5 gpm (13.25 lpm) 20°C inlet water temperature 20-30 psi (1.38 to 2.07 bar) pressure differential for water inlet and outlet. Cooling water must be non-corrosive
OPERATING ENVIRONMENT²	
Operating Temperature	+20° to +28°C; +23°C nominal
Humidity	0 to 60%; 45% nominal
CONNECTION INFORMATION	
³ / ₄ " Female NPT fittings for connecting Facility Water Supply (IN) and Return (OUT) to the unit.	

WEIGHTS & DIMENSIONS

Base ³	Width: 61.0 cm (24 in.), Depth: 72.4 cm (28.5 in.), Height: 108 cm (42.5 in.)
System Weight	Not packed: 236 kg (520 lbs.) Packed: 365 kg (805 lbs.)
Mobility	Four static dissipative, swivel caster wheels
Maximum Reach	160.0cm (63 in.)
Maximum Operating Height	130.3 cm (51.2 in.) Extended height option: 188.0 (74.0 in.)
Minimum Operating Height	69.1 cm (27.2 in.) Extended height option: 81.3 (32.0 in.)
Noise Level	<56 dBA

SERVICE & SAFETY

Refrigerants	HCFC and CFC-free, non-toxic, non-flammable
Serviceability	Auto-diagnostics and field replaceable modules
Over Temperature Protection	Settable high and low air temperature limits (factory set at +230°C)
Compliance	CE, RoHS, EU 517/2014 (<10 tons CO ₂ eq, no annual leak testing required)

¹System is configured for operation within voltages listed above using an internal transformer. Please specify power configuration with order
²Under operating conditions which are greater or less than nominal, performance may be less than specification provided
³An additional 20.3cm (8 in.) clearance is required for supply connections and cabinet ventilation

